

REQ.20/21

REQUISITION FORM FY 20/21

DATE PREPARED: 10/27/2020
REQ. CONTACT PERSON: Gerald Bailey / Randy Looock / James Pagliuca
REASON: Replacement of 5 CC trucks 3920, 3921, 3922, 3923, 3924
VENDOR # OR NAME: ETR. Inc. #1002531
CONTACT & TEL: Fred Joseph Phone: 407-339-6737 Cell: 904-424-4267 Fax: 407-339-8198
EMAIL ADDRESS: fred@etrllc.org
VENDOR ADDRESS: 700 S. FRENCH AVE.. Sanford, FL 32771
SHIP TO: PW-WC-LA-(FT) (CIRCLE ONE)
DELIVER BY DATE: 9/30/2021


ITEM DESCRIPTION:

LINE #1: Florida Sheriff's Association, Florida Association of Counties & Florida Fire Chiefs
Association. Contract # FSA20-VEF 14.01 Specification # 01
2021 Dodge 5500 AEV Type 1 Ambulance 2Wheel drive

(See attached quote with options)

QTY.: (5)
ORDER UOM: Unit
UNIT COST: \$ 227,265.00 TOTAL REQ. AMT. \$ 1,136,325.00

ACCOUNT# 506

APPROVED:  10-2-2020
ASST. PW DIRECTOR DATE

CAPITAL OUTLAY # _____

APPROVED: _____
DIRECTOR DATE

FISCAL ASST: 2021-1209
DATE

COMMENTS: Replacement of 5 CC trucks 3920, 3921, 3922, 3923, 3924,

Bid Award # FSA20-VEF 14.01
2021 Dodge 5500 AEV
(AEV Type I Ambulance, Dodge 5500 4x2)
Specifications #01

Total Cost for (5) Rescue Unit's **\$ 1,136,325.00**

Vendor: ETR, Inc
212 Hickman Drive
Sanford, FL 32771
Contact: Fred Joseph
Email: fred@etrllc.org
Cell Phone: 904-424-4267
Fax-407-339-8198

**Replacement for 5 CC trucks
3920, 3921, 3922, 3923, 3924**



October 14, 2020

Mr. Gerald Bailey
Fleet Manager
Alachua County Fire Rescue
5620 N.W. 120th Lane
Gainesville, FL 32653

We are pleased to provide you with the following pricing, shop order, and drawings for the purchase of five (5) new 2021 Dodge 5500 gas 6.4L Hemi with Custom AVE Type I module. Pricing is based on purchasing these units off the Florida Sheriffs Contract Bid No. FSA20-VEF 14.01 Fire Rescue Vehicles & Other Equipment Specification #01 Type I Ambulance 4x2 wheel drive.

PRICING:

- Total price per unit 2020 chassis 07/15/20..... \$226,117.00
- Total price increase 2021 chassis 10/14/20 \$ 1,148.00
- Total price per unit \$227,265.00
- Total price for five (5) units - \$1,136,325.00
- Included in above price: your present graphic/chevrons layout, and vinyl cab seats.
- Plus, applicable taxes, tag, and title
- Above price is based purchasing 5 new Dodge 5500 AVE Type I units
- TERMS: Payment in full is due upon the delivery of each completed vehicle. Upon payment, ETR shall furnish the purchaser a "Statement of Origin" or the necessary validated documents required for title application.

Sincerely,


Fred Joseph
Regional Sales Manager
ETR, L.L.C.

Corporate Office: 700 S. FRENCH AVE. Sanford, FL 32771 | T 407-339-6737 Toll Free 1-884-612-8148
Georgia Office: Juliette, GA. 31046 | Toll Free 1-884-612-8148

"18 YEARS OF RESPONDING TO YOUR NEEDS"

www.ETRVEHICLES.com



Shop Order

ETR
Fred Joseph

Alachua County
PO Box 1188
Gainesville, FL 32602

Exp. Date: 11/09/2019
Quote No: 10013-0080
GENERAL: Gen_Info
CHASSIS: DOD45/55LW
CONVERSION: 172T1LWDD
BASE: 172T1LWBDR

*****BID STANDARDS*****
*****DODGE 192 WB CHASSIS*****
172 x 95 T-1 LWB Dodge Mod Body, Conversion
172 x 95 T-1 LWB Dodge Base Price

10/14/2020

Job/Order No: Proposal

Page 1

PART NO	S	DESCRIPTION	QTY
===== *****BID STANDARDS***** - 15.011 10/08/19 =====			
00-00-0107		-- Order Date: Post July 1, 2019	1
00-00-0113	<	-- Ambulance Built to Star Of Life KKK-A-1882-F Certification, Latest Revision	1
Exceptions to be noted on final sticker.			
00-10-0015	S	Vehicle Quantity (5 Vehicles)	1
00-91-0002		BODY NUMBER:	1
00-91-0005		-- MICKEY BODY DUE DATE :	1
00-91-0003		CHASSIS VIN NUMBER:	1
00-91-0024		ACCOUNT MANAGER: Mikael Blevins	1
00-91-0027	S	REFERENCE UNIT #: 200D 26302-04G	1
00-91-0028	S	RE-WRITE DATE : 10-10-19	1
00-91-0040		SEAT BELT POSITIONS MODS	1
00-91-0042		-- CAB SEAT BELT MOD:	1
00-91-0044		-- Total: 2 Positions	1
00-91-0050		-- REAR SEAT BELT MOD:	1
00-91-0052		 -- Total: 3 Positions	1
00-99-9000		Revision Level: 0 - Zero - ORIGINAL VERSION	1
00-99-9030		Change Order Level: 0 - Zero - ORIGINAL VERSION	1
===== *****DODGE 192 WB CHASSIS***** - 15.011 10/08/19 =====			
01-1F-0000		Type I Modular Ambulance	1
01-AP-1D74	S	< 2021 Dodge, 5500 4 x 2 DRW Reg Cab, 192" WB, SLT, 6.4L Hemi	1
no discounts are included in this pricing			
Limited model year offering.			
01-3D-AU0A		 -- Cab Equipment: Keyless Remote Option	1
01-3D-AU0A	X	< -- SPECIAL ORDER CHASSIS OPTIONS	1
NOTE: Special Order Chassis With Vinyl Seats and Dodge Flame Red Paint			
NTOE: OEM Third Brake Light on Cab to be Hooked Up to Operate			
01-3D-DB6A		 -- Mirror: Exterior, Electric and Heated	1

PART NO	S	DESCRIPTION	QTY
01-3D-V46A		/-- Front Bumper: Chrome Steel	1
01-3D-69IA		/-- Interior Trim, Medium Gray	1
01-3D-AQTC		/-- Cab Seats: Driver and Passenger, Captain's Chairs	1
01-3D-URSD		/-- Radio: Cab AM/FM, voice activated, blue tooth Uconnect	1
01-3D-C68G		/-- Engine: 6.4L Heavy Duty Hemi V-8 Gasoline engine	1
01-3D-C710		/-- Ram Ambulance Prep Group AH2-	1
01-3D-D010		/-- RAM up-fitter interface module	1
01-3D-D1HL		/-- High Idle (Throttle): OEM Voltage Monitoring Auto Idle-Up System	1
01-3D-K65A		/-- Alternator: Single 220amp	1
01-3D-C74E		/-- Transmission: Automatic Dodge DF3 Asin 6-Speed HD w/Overdrive	1
01-3D-D3AC		/-- Air Conditioning Connector Package: N/A	1
01-3D-EC1B		/-- Wheelbase: The wheelbase is 192" & 108" Cab to Axle	1
01-3D-GVW8	S	/-- GVWR (4x2): GVWR 18,000 pounds, FAWR = 6,500 , RAWR = 13,500	1
01-3D-K65A		/-- Alternator: Single 220amp	1
01-3D-K660	S	/-- Batteries: (2) 730 CCA Batteries, (1) Under Hood & (1) in M7 Compartment	1
01-3D-KA4A	S	/-- Engine Block Heater: NONE	1
01-3D-M001	<	/-- Rear Suspension: D-45/5500, Susp-DS135RS3A Liquid Spring, 2019+ SUSP-D135RS3A rev level as of 05/17/2019 *NOTE: If Oxygen Lift is installed, then if the O2 Cmpt Door is open, the kneeling suspension will not dump until door is closed*	1
01-TT-0100	<	/-- Rear Suspension 1,000 mile re-torque requirement Rear Suspension manufacturer requires inspect & re-torque at 1,000 Miles	1
01-TT-0208	<	/-- ""DETAIL"" Liquid Rear Suspension Decal Install Prior to delivery, detail department is to install a Black Decal on the dash:	1
04-SU-0601		/-- Kneeling Feature: Enable Switch Located in CAB console	1
04-SU-0610		/-- Kneeling Feature: Activated by TRAILING rear access door	1
04-SU-0651		/-- Exhaust system termination point: OEM Location, Rt Rear	1
04-SU-14LV		/-- Leveling Valves: Dual, (1) Left, (1) Right	1
04-SU-2020	S <	/-- Liquid Spring controller installed on dash left of steerin wheel NOTE: Mount Liquid Spring Controller on Dash Left of Steering Wheel	1
01-3D-N1BA		/-- Exhaust System: with side exit	1
01-3D-NH4A		/-- Fuel Tank: 52 Gallon, Single	1
01-3D-R3CA		/-- Front Tire Tread: Premium Highway	1
01-3D-R4LA		/-- Front Tires: Pair of 225/70R19.5F	1
01-3D-RPMA		/-- Front Wheels: 19.5" x 6.75 Steel	1
01-3D-RPWA		/-- Rear Wheels: 19.5" x 6.75 Steel	1
01-3D-S3CA		/-- Rear Tire Tread: Premium Highway	1
01-3D-S4LA		/-- Rear Tires: Two pair of 225/70R19.5F	1
01-3D-ST04		/-- Tire SPARE: Matching Random Make D45/5500 OEM supplied	1
01-FM-TI01		/-- Location: Shipped Loose	1
01-TU-0110		/-- Jack and Tire Tools: Ship Loose	1
01-3D-ST10	S	/-- Wheel Finish: Factory Steel (No Simulators Installed)	1
ZZ-ZZ-ZZZZ			1
		== 172 x 95 T-1 LWB Dodge Mod Body,Conversion - 15.011 10/08/19 ==	1
		BODY Generation 9	1
01-X0-0001	<	/-- Body Certification Provided to Specification The Body Manufacturing group certifies that this Ambulance Modular body has been constructed of materials and methods that meet or exceed the standards as required by the AEV Generation 9 Body Specification of December 11th, 2018 as published. The body shall be built and constructed to the submitted work order and the AEV Generation 9 build standards without exception. Any Deviations to the work order or Generation 9 build standards must have written authorization prior to body delivery to AEV by the AEV Body Engineer on file.	1

PART NO	S	DESCRIPTION	QTY
02-00-0002	XS <	/-- Body Build Information Body Number; Account Manager; Mikael Blevins Chassis Type : 2021 Dodge, 5500 4 x 2 DRW Reg Cab, 192" WB, SLT, 6.4L Hemi Mickey Body Due Date; Rear Suspension: D-45/5500, Susp-DS135RS3A Liquid Spring, 2019+	1
02-00-0003	<	/-- ALL DIMENSIONS ON ORDER WILL HAVE A VARIABLE OF + OR - 1/4" Unless specified as a minimum dimension.	1
02-B2-1098	S	Body, Mod:Dodge Type 1 LWB, 172" x 96" x 72" Interior HR - 6" Body Drop	1
02-00-0006		/-- Headroom: 74/72" Finished Interior - Ducted A/C	1
02-00-0060		/-- Compartment and Entry door Full length Stainless Steel Hinges std	1
02-B0-CC01	<	/-- Compartment Construction: STANDARD, Unless Specified Otherwise Sides and Back: .100 Polished Aluminum Diamond Plate Compartment Ceiling: .090 Aluminum Sheet	1
02-B0-SFL0	<	/-- Compt Floors: Sweep-out, even with bottom door jamb Unless Specified Otherwise.	1
02-B0-CC41		/-- Compartment floor thickness .125" standard	1
02-B0-CC18		/-- Compartment Ventilation - Flap style #VT-2495-A01, STD	1
02-BC-0604		/-- Talk through, Cab to Mod Window (T1) With Sliding Window 2017+ F	1
02-BC-0700	<	/-- Cab Roof Support : 3/16" x 3" Steel Plate, Per Engineering Drawing Between cab headliner and bottom side of cab roof to prevent oil canning.	1
02-BD-0100		/-- Body Drop: 6" Curbside, Ahead of Rear Wheels	1
02-M1-CE05		/-- Curb side Entry Door (CSE): 82.812 High x 31 Wide T1 LWB	1
02-B0-09B0		/-- Compt Door Check: Double Action Gas Shock	1
04-EA-09B1		/-- Door Swing Angle: Set to 90-100 degrees	1
02-B3-MD64		/-- Step Well, CURBSIDE Entry Door, 2-Step Diamond Plate	1
05-IL-09SW		/-- Light, Step Well: 3" Weldon, White, Activate with C/S entry door	1
ZZ-ZZ-ZZZZ		/--	1
02-M1-M167	S <	/-- M-1 Compt (LF): 72 HR, 70.25" H x 22." W x 21" D (See Drawing) Splash Shield: Add a deflector plate between M-1 and M-2 to shield water splash from the compartment louvers. NOTE: Compartment to Have Attic Space for Backboards to Fit NOTE: O2 Rack Will be Installed in this Compartment	1
02-B0-CC02	<	/-- Compartment Construction: STANDARD Diamond Plate Sides and Back: .100 Polished Aluminum Diamond Plate Compartment Ceiling: .090 Aluminum Sheet	1
02-B0-CC08		/-- Compartment Door Panel: Diamond Plate	1
12-DC-GA10		/-- Compartment Finish: Diamond Plate Standard	1
02-B0-CC16		/-- Compartment Door Ventilation - small punched half-moon Louvered Door	1
02-B0-SWFL		/-- Compt Floor: Sweep-out, even with bottom door jamb.	1
02-B0-CC41		/-- Compartment floor thickness .125" standard	1
02-BC-10A5		/-- Compartment Door: SINGLE DOOR, Forward hinged 2-point Latch	1
02-B0-09B0		/-- Compt Door Check: Double Action Gas Shock	1
04-EA-09B2		/-- Door Swing Angle: Set to 110 -120 degrees	1
04-TS-20RB	S <	/-- Retainer Bar: Installed In Exterior Compartment Each NOTE: Installed From Wall #1 to Wall #3 In Upper Section of Compartment (Reference 190D 24809-12G)	1
04-TS-14M1	S <	/-- M1 Divider, Vertical, Full compartment height and full depth, alum, Fixed NOTE: Mount Divider 6" From Wall #1	1
05-EL-4M18	S <	/-- Light, Compartment: Maxxima LED 18" , EA, ILOS MTB Note: No light hole required NOTE: Mounted on Ceiling Near Door Jamb Centered Left to Right	1

PART NO	S	DESCRIPTION	QTY
09-ZZ-ZZZZ		/--	1
02-M1-M277	S	/-- M-2 Compt (LFM): 41" H x 51" W x 21" D >> Dodge chassis only	1
02-B0-CC02	<	/-- Compartment Construction: STANDARD Diamond Plate Sides and Back: .100 Polished Aluminum Diamond Plate Compartment Ceiling: .090 Aluminum Sheet	1
02-B0-CC08		/-- Compartment Door Panel: Diamond Plate	1
12-DC-GA10		/-- Compartment Finish: Diamond Plate Standard	1
02-B0-SWFL		/-- Compt Floor: Sweep-out, even with bottom door jamb.	1
02-B0-CC42	<	/-- Compartment floor thickness .25" ILOS (Heavy Duty) MTB to increase compartment floor thickness to .25 inch smooth aluminum.	1
02-B0-SWFL	X <	/-- Compartment Door Reinforcement: AEV to Install NOTE: Install 1/4" Plate for SCBA Bracket to be Mounted on M2 Trailing Door. Install 6" wide plate mounted vertical centered side to side	1
02-B1-BIOX	S <	/-- Diamond Plate Dog Leg on Ceiling of M2 See Drawing	1
02-BC-10D0		/-- Doors, Compartment, DOUBLE DOORS (std)	1
02-B0-09B0		/-- Compt Door Check: Double Action Gas Shock	1
04-EA-09B1		/-- Door Swing Angle: Set to 90-100 degrees	1
05-EL-4M18	S <	/-- Light, Compartment: Maxxima LED 18", EA, ILOS MTB Note: No light hole required	1
		NOTE: Mount on Ceiling Near Door Jamb Centered Left to Right	
05-HB-1325	XS <	/-- Condenser, 12V: Pro -Air Dual Fan, FRKG 126 under the module body 60,000 BTU	1
04-HA-1300	S <	/-- Condenser Brackets: Under M-2, angled down BRKT-52001206	1
06-RR-13A0	S <	/-- Conduit No 1: 2", with pull wire NOTE: The 2" Conduit Will Run From Cab Console to the Second Radio Storage Cabinet in the Side of the ALS Cabinet In the Upper Left Corner of the Cabinet.	1
		NOTE: CONDUIT TO HAVE MINIMAL BENDS	
06-RR-1301	S <	/-- CONDUIT ORIGATION POINT: Center Console NOTE: Run Conduit Through Front of Box and Under Cab to Inside Console	1
06-RR-13T2	S	/-- CONDUIT TERMINATION POINT: Second Radio Storage Cabinet on ALS	1
06-RR-13G0	S <	/-- Conduit No 2: 2", with pull wire NOTE: The 2" Conduit Will Run From Cab Console to the Second Radio Storage Cabinet in the Side of the ALS Cabinet In the Upper Left Corner of the Cabinet.	1
		NOTE: CONDUIT TO HAVE MINIMAL BENDS	
06-RR-1301	S	/-- CONDUIT ORIGATION POINT: Center Console	1
06-RR-13T2	S	/-- CONDUIT TERMINATION POINT: Second Radio Storage Cabinet on ALS	1
06-RR-13Z0	S <	/-- Conduit #3: 2", with pull wire NOTE: The 2" Conduit Will Run From Street Side Action Area to the Second Radio Storage Cabinet in the Side of the ALS Cabinet In the Upper Left Corner of the Cabinet.	1
		NOTE: CONDUIT TO HAVE MINIMAL BENDS	
06-RR-1304	S	/-- CONDUIT ORIGATION POINT: Street Side Action Area	1
06-RR-13T3	S	/-- CONDUIT TERMINATION POINT: Second Radio Storage Cabinet on ALS	1
09-ZZ-ZZZZ		/--	1
02-M1-M294	S <	/-- M-2.5 Compt (LWW): 10" H x 32" W x 21" D Cannot have a flip down CPR seat. Fixed pad only. Deletes interior Cab F.	1

PART NO	S	DESCRIPTION	QTY
02-B0-CC02	<	/-- Compartment Construction: STANDARD Diamond Plate Sides and Back: .100 Polished Aluminum Diamond Plate Compartment Ceiling: .090 Aluminum Sheet	1
02-B0-CC08		/-- Compartment Door Panel: Diamond Plate	1
12-DC-GA10		/-- Compartment Finish: Diamond Plate Standard	1
02-B0-SWFL		/-- Compt Floor: Sweep-out, even with bottom door jamb.	1
02-B0-CC41		/-- Compartment floor thickness .125" standard	1
02-BC-10F0	S <	/-- Door, Compt, SINGLE DOOR, 1-pt Latch, Hinge Bottom NOTE: Install 2 Cables to be through bolted on M2.5 Door To Hold Door Above SCBA Doors	1
05-EL-4M18	S <	/-- Light, Compartment: Maxxima LED 18" , EA, ILOS MTB Note: No light hole required NOTE: Mount on Ceiling Near Door Jamb Centered Left to Right	1
09-ZZ-ZZZZ		/--	1
02-M1-M379	S <	/-- M-3 Compt (LR): 61.5" H x 36" W x 21" D NOTE: Custom Box Off In M3 Compartment for (3) Portable O2 Brackets at floor Line at Rear Near Wall #3. NOTE: Custom Box Off in M3 Compartment At Top For Danhard Installed With an Access Panel for Service.	1
02-B0-CC02	<	/-- Compartment Construction: STANDARD Diamond Plate Sides and Back: .100 Polished Aluminum Diamond Plate Compartment Ceiling: .090 Aluminum Sheet	1
02-B0-CC08		/-- Compartment Door Panel: Diamond Plate	1
12-DC-GA10		/-- Compartment Finish: Diamond Plate Standard	1
02-B0-SWFL		/-- Compt Floor: Sweep-out, even with bottom door jamb.	1
02-B0-CC41		/-- Compartment floor thickness .125" standard	1
02-BC-1000		/-- Compartment Doors: DOUBLE DOORS, ILOS single	1
02-B0-09B0		/-- Compt Door Check: Double Action Gas Shock	1
04-EA-09B1		/-- Door Swing Angle: Set to 90-100 degrees	1
04-TS-11B0	S <	/-- Shelf, Adjustable, Ext: .125 Aluminum, 2" Upward Lips NOTE: Notch Shelf Around Box Off for Portable O2 Brackets	1
04-TS-4010		/-- Shelf Bracket: CPI 90 Deg with Slotted Holes	1
05-EL-4M36	S <	/-- Light, Compartment: Maxxima LED 36" , EA, ILOS MTB Note: No light hole required NOTE: Mounted on Wall #1 Near Door Jamb Centered	1
09-ZZ-ZZZZ		/--	1
02-M1-M575	S	/-- M-5 Compt (RR): 28.75" H x 34" W x 21.0"D	1
02-B0-CC02	<	/-- Compartment Construction: STANDARD Diamond Plate Sides and Back: .100 Polished Aluminum Diamond Plate Compartment Ceiling: .090 Aluminum Sheet	1
02-B0-CC08		/-- Compartment Door Panel: Diamond Plate	1
12-DC-GA10		/-- Compartment Finish: Diamond Plate Standard	1
02-B0-SWFL		/-- Compt Floor: Sweep-out, even with bottom door jamb.	1
02-B0-CC41		/-- Compartment floor thickness .125" standard	1
02-B0-SWFA	X <	/-- Compartment Door Reinforcement: AEV to Install NOTE: Install 1/4" Plate for Future Installation for SCBA Bracket to be Mounted on Trailing M5 Door. Install 6" wide plate mounted vertical centered side to side	1
02-BC-1000		/-- Compartment Doors: DOUBLE DOORS, ILOS single	1
02-B0-09B0		/-- Compt Door Check: Double Action Gas Shock	1
04-EA-09B1		/-- Door Swing Angle: Set to 90-100 degrees	1
05-EL-4M18	S <	/-- Light, Compartment: Maxxima LED 18" , EA, ILOS MTB Note: No light hole required	1

PART NO	S	DESCRIPTION	QTY
NOTE: Mounted on Ceiling Near Door Jamb Centered Left to Right			
09-ZZ-ZZZZ		--	1
02-M1-M600		-- M-6 Compt (RRFwd): Delete	1
02-M1-M775	S <	-- M-7 Compt (RF): 67.5" H x 32.75" W x 21.0" (Below FL), I/O NOTE: M7 Compartment Below Floor Will be Diamond Plate and Install a Vent on Wall #3 Behind Diamond Plate Battery Cover for Battery to Vent.	1
02-B0-CC16	S <	-- Compartment Door Ventilation - small punched half moon Louvered Door Louvers to be punched below floor level in M7 on wall #3 for battery storage area To Vent outside patient compartment To have splash shield under louvers	1
02-BC-1000	S <	-- Compartment Doors: DOUBLE DOORS, ILOS single NOTE: Rear M7 Trailing Door to Open 90 Degrees to Keep From Hitting C/S Entry Door. This Will Require a Custom Door Shock Bracket.	1
02-B0-09B0		-- Compt Door Check: Double Action Gas Shock	1
04-EA-09B1		-- Door Swing Angle: Set to 90-100 degrees	1
05-EL-40M7		-- Light, Compt, M-7 (RF): NONE	1
ZZ-ZZ-ZZZZ		--	1
02-M1-M888		-- M-8 Drawer (RF): None - Batteries Under Hood	1
02-M1-RA03		-- Rear Access Doors: 46 3/4" Wide x 60 5/8" High	1
ZZ-ZZ-ZZZZ		--	1
ZZ-ZZ-ZZZZ		--	1
WELDING - CELL 1			1
04-TS-CYL1	S <	-- SCBA Storage, (2) Street Side, w/ Hinged Access Doors-SAE J3043 compliant Hinged door on exterior of module, to access SCBA cylinders. (2)HOUS-AD0005 CPI #AD0005-1 (1) TUBE-SCBA-L ABS inner tube (1) TUBE-SCBA-R SAE Testing received July 30, 2018 from vendor.	1
04-AS-0370		-- Wire/Hose Cover : Diamond Plate, Between Cab & Module	1
ZZ-ZZ-ZZZZ		--	1
04-AS-0382	<	-- Pass-Thru cab mounted wind deflector - Aluminum Diamond Plate AEV Weld shop builds and installs, Attaches to Cab side of bellows mount. Same width as bellows mount with short down turned sides. Secured on sides to bracket. Small up-turned lip at back of wind deflector. non-Painted	1
04-AS-06A0		-- Fuel Fill: CPI C1045, Open Housing, Polished Bezel - (Std)	1
04-BW-7A95	<	-- Bumper, Rear: HD Alum Framed w/DP pontoon covers Type 1 PURCHASED WITH BODY	1
04-BW-FLMD		-- Step, Center: 2" x 9" Grip strut, flip-up	1
04-BW-FRB0		-- Step, Bus Style: None	1
04-BW-RF20	<	-- Fenders, Rear: Rubber Extruded, Black MTB #7215439	1
04-BW-DP01		-- Skirt Rails: Polished Aluminum Diamond Plate, Box style std	1
04-BW-DP04		-- Rear Kick Plate: Polished Aluminum Diamond Plate	1
04-BW-TA03		-- Recessed Tag Area: Polished Aluminum Diamond Plate	1
04-BW-TA04		-- Location: Centered in the kick plate	1
05-EL-44TN		-- Tag Light: Kinequip LED #132703C	1
04-BW-DP92	<	-- Corner Caps: 24.0" High, Alum Diamond Plate If there is a body drop, add the appropriate height to Corner Caps.	1
04-BW-DP93	<	-- Front Stone Guards: 24.0" High, Alum Diamond Plate If there is a body drop, add the appropriate height to Stone Guards.	1

PART NO	S	DESCRIPTION	QTY
04-DE-0010		-- Rear Deflector: NONE	1
04-EA-0900		-- (4) Rear Door Hold Opens: Grabber Style, Top/Bottom each door ILOS	1
04-EA-14D1	<	-- Running Boards, Diamond Plate, w/ Full length Grip strut edge (Dodge 2Door) full outer edge of board is grip strut in the design.	1
04-EA-1123		-- Mud Flaps Front: Modular, Rubber, Dodge Type 1	1
04-EA-1132		-- Mud Flaps Rear: Modular, Rubber AEV LOGO	1
ZZ-ZZ-ZZZZ		--	1
04-EA-09A0		(2) Rear Door Hold Opens: Grabber Style, each door	1
		EXTERIOR LIGHTING / HEAT/AC / INSULATION - CELL 2	1
05-EL-1800		CORNER CAP LED ICC/WARNING LIGHTS	1
05-EL-18F0		-- Front Corner Cap LED ICC/Warning Lights: Warnings RED/WHITE	1
05-EL-18F1	<	-- Front Center ICC Lts: (3) AMBER Kinequip LED No 112401A, Switch w/ Headlights.	1
ZZ-ZZ-ZZZZ		--	1
05-EL-18R5		-- Rear Corner Cap LED ICC/Warning Lights: Warnings RED/AMBER	1
05-EL-18R1	<	-- Rear Center ICC Lts: (3) RED Kinequip LED No 112401R Switch w/ Headlights	1
ZZ-ZZ-ZZZZ		--	1
06-SW-CC01		-- ICC Warning Lights Switched: Primary Only	1
ZZ-ZZ-ZZZZ		--	1
05-EL-2310		Tail Lights, Whelen LED Combinations , ILOS,	1
05-EL-19MO	S <	-- Side Marker Lights: (2) RED Kinequip LED No 112401RD Switch w/ Headlights.	1
		Mounted in the ends of the bumper pontoons. The lights will act as side marker lights and turn signals.	
05-EL-2314		-- Whelen 600 Series, Tail Lights	1
05-EL-0201		-- Flanges: (6) Chrome for above 600 Series Tail lights - INCL	1
05-EL-2320		-- Stop/Tail, Whelen 600 Series, LED, Pair, Maximum Populated	1
05-EL-2326		-- Turn, Whelen 600 Series, LED, Pair Horizontal - with turn arrow	1
05-EL-2332		-- Back up, Whelen 600 Series, LED, Pair, Maximum Intensity ILOS	1
ZZ-ZZ-ZZZZ		--	1
05-EL-2580	S <	Underbody Ground Lights, (4), Underbody, LED Kinequip #108818C 8" strip lite With Switch in Console. Lights to Work in Park Gear only. Part No: LITE-K1088	1
		NOTE: (1) Light Installed Under C/S Entry Door, (1) Light Installed Under Rear Bumper for Rear Entry Door, and (1) Light Installed Under Each Cab Running Board.	
05-EL-4300		Patient Area Turn and Stop Light Indicator: None	1
05-EL-43SR	<	Third (3rd) Brake Light: Kinequip KFL-3BLO1 LED LOCATION: Over Rear Access Doors. Do not cut traditional hole. Just screw and wire holes required.	1
05-EL-43T2		-- Light is to steady burn, no flash	1
05-EL-4580		SCENE/FLOOD LIGHTS (Whelen 900 LED-24 Series)	1
05-EL-45L6	<	-- Left Scene Lights: (2) LED-24, Whelen 900 Chrome flanges for this light included	1
06-EL-18LF		-- Left Flood Activate: Left Flood Switch	1
05-EL-45T6	<	-- Right Scene Lights: (2) LED-24, Whelen 900 Chrome flanges for this light included	1
06-EL-18RT		-- Right Flood Activate: Right Flood Switch and open CSE Door	1
05-EL-46R6		-- Rear Load Lights: (2) LED-24, Whelen 900	1
06-EL-18RE		-- Activate: Rear Flood Switch, Reverse and Lead RA Door	1
06-EL-1800		-- Add Activation: Rearward Left and Right scene lights. come on w/ Reverse	1
05-HA-0654	XS <	Secondary Heat/AC: Danhard 125VAC System, 50-3000 All underbody components must be mounted ahead of rear axle if Possible. With Danhard thermostat 50-2310 mounted in A/A Install an Engraved Label Red	1

PART NO	S	DESCRIPTION	QTY
		With White Letters to say "SHORELINE A/C" Danhard Located in Street Side Wall Cabinet Below Top Cabinets at Rear With Box Off In Top of M3 Compartment With an Access Panel to Service. Thermostat on A/A in line with 02 outlets NOTE: Control Box Mounted in M2 Compartment on Ceiling	
05-HA-065J	<	/-- Danhard Digital Thermostat remote mounted included Location:	1
05-HB-13GE	<	AC (HVAC): PRO-AIR, Ducted in Ceiling - Vertical- TI Dodge Mounted Behind the Attendant Seat Base	1
04-VP-001G		/-- Electric Water Valve For Heater units	1
05-HA-1306		/-- A/C Condenser: See M2 Cmptr for Condenser Information	1
05-HA-14A0		/-- Side Plenum Grille, Return Air: Stamped Powder Coated Steel	1
05-HA-14C0		/-- AC COMPRESSOR: Tee into OEM	1
05-HB-14PC		/-- AC Evaporator: Pro-Air (AC/Heat unit) w/ dual fans - STD vertical 941	1
05-HA-1404		/-- Heater Hoses: EPDM - Nomex Rubber (per Ford QVM)	1
05-HA-1440	S <	/-- Heater Hose manual Ball valves installed (2) VALV-01101401A ball valves installed (4) FITT-08 worm clamps as needed Manual ball valves installed on the heater hoses input and output feed lines. HOSES TO BE EXTENDED TO ALLOW BALL VALVES TO BE IN THE UPPER AREA OF THE ENGINE BAY ACCESSIBLE FROM UNDER THE HOOD MOUNTED TO METAL BRACKET TO PREVENT MOVEMENT	1
05-HA-14B5		/-- FILTER: Washable Carbon Pre-Filter	1
05-HA-14D1	<	/-- Ducted A/C Delivery: Insulated foil wrap, 10 registers 8 registers in ceiling; 2 registers on A/C Cabinet face.	1
10-HA-0304	<	/-- Thermostat, Rear A/C, Digital, Class 1 LX-1, Includes Front Also Thermostat located in A/A as part of LX1 Multiplexed System	1
05-IL-0051		CEILING PANELS: ACM Gloss White	1
05-IL-0261		/-- Dome Lts, LED K-EDGE (4) Streetside, (4) Curbside std	1
ZZ-ZZ-ZZZZ		/--	1
05-IL-05T1	<	/-- Timer, Constant Hot, Check out, Class 1 Multiplex System Activated with opening of either C/S or Rear Entry Doors.	1
06-EC-0914	<	/-- 15 Minute Activation Light Circuit to stay on for 15 minutes when entry door is opened.	1
06-EC-09P1		/-- Timer to Power: Street side DOMES, High intensity	1
ZZ-ZZ-ZZZZ		/--	1
09-MH-08A1		/-- IV Hook No 1: Hook 07 w/ Velcro bag stabilizer - STD	1
29-MH-1000		/-- LOCATION: Over head/chest area, primary patient on COT	1
09-MH-08A2		/-- IV Hook No 2: Hook 07 w/ Velcro bag stabilizer - STD	1
09-MH-08P2		/-- LOCATION: Over head/chest area, secondary patient on S/B	1
ZZ-ZZ-ZZZZ		/--	1
09-MH-08A3		/-- IV Hook No 3: Hook 07 w/ Velcro bag stabilizer - IATS	1
09-MH-08P3		/-- LOCATION: Over Knee/Waist area, primary patient on COT	1
09-MH-08A4		/-- IV Hook No 4: Hook 07 w/ Velcro bag stabilizer - IATS	1
09-MH-08P4	S	/-- LOCATION: Over Knee/Foot area, secondary patient on S/B	1
09-MH-2AC6	<	/-- Recessed C/S Grab Rail, ceiling: 1.25 Dia..... 3 pt, 72in, Yellow Antimicrobial Grab Rail will be recessed in a ABS pan.	1
09-MH-2ASS		/-- Streetside Grab Rail: None	1
		Insulation PKG: Generation 9 Body Std.	1
05-IN-1STD	<	/-- Insulation: Circumferential PKG, Single Layer Reflective w/ Air cell core single layer reflectix	1
05-IN-3SDX	S <	/-- Insulation: All Module Entry Doors, 2" Black Foam, ILOS #INSU-ARM2	1

PART NO	S	DESCRIPTION	QTY
NOTE: Install Insulation in Entry Doors to Fill Up All Space Possible. Around Windows and All Door Hardware.			
05-IN-4ST9	<	<i>/-- Insulation Sound Deadening: Generation 9 Floor</i> Generation 9 Floor Design	1
05-IN-5STD	<	<i>/-- Blue Block foam WALLS/CEILING Insulated PKG: 1" Thick, IATS Reflective</i> The block foam insulation shall be fitted tightly against the structural members to maximize R-value. Gap spacing round each cell within the structure grid	1
05-IN-6STD		<i>/-- Stepwell Insulation: None</i>	1
05-LB-6100	<	<i>/-- Light Bar Alternative, (4) Across Front, 92" or wider</i> In Addition to Standard Front Three (3) Body Warning Lights. Seven (7) Total Lights Across Front of Body.	1
05-LB-6222		<i>/-- Front of Module SLED System - 92" and wider (4)</i>	1
05-LB-6650		<i>/-- Whelen, 900 Super LED, (4) RED</i>	1
05-LB-6897		<i>/-- Flasher for LED front of module: None</i>	1
05-PH-LS0F		<i>/-- Flanges: (4) 900-Chrome Flanges for lights above</i>	1
05-PL-LV13		<i>/-- Light: Whelen 900, Super RED LED/CLEAR LENS, Programmable IATS</i>	4
05-PL-LX00		<i>/-- Lens color for Above LED Light to be: Clear</i>	4
05-PL-LXZ2		<i>/-- LED Color for Above 900 Super LED: RED</i>	4
25-PH-LT84		<i>/-- LED Lights: Programmable, Single Light</i>	4
ZZ-ZZ-ZZZZ		<i>/--</i>	1
05-LB-6900		<i>/-- Alternative Lightbar Switching, Prim/Sec</i>	1
05-PA-LB0B		<i>/-- Rear Light Bar: NONE</i>	1
05-SY-LTLH		WHELEN LED WARNING LIGHT SYSTEM - Dodge LTD	1
05-FS-0710	<	<i>/-- Flasher: None, All Super LED's Are Programmable</i> Fast, Alternate within each fixture, Random Flash unless otherwise specified.	1
05-FS-10P4		<i>/-- Flash Pattern: None, Internal Light Head Flasher</i>	1
11-ZZ-0909	<	<i>/-- CAAS GVS Exception to C.8.2.12 Warning lights non-compliant to Table 1 dual mode</i> The Warning lights pattern chosen by the Customer does not meet either the required photometric output flash or the pattern required of Table 1, Dual mode, Primary Secondary of CAAS C.8.2.12. An exception has been taken for only this element to the standard.	1
06-SW-PS01		<i>/-- Warning Light SWITCH: center console, Primary / Secondary</i>	1
11-ZZ-0909	<	<i>/-- CAAS GVS Exception to C.8.2.12 Warning lights non-compliant to Table 1 dual mode</i> The Warning lights pattern chosen by the Customer does not meet either the required photometric output flash or the pattern required of Table 1, Dual mode, Primary Secondary of CAAS C.8.2.12. An exception has been taken for only this element to the standard.	1
ZF-01-0016		<i>/-- Standard Pattern Table</i>	1
ZF-03-0100	S	<i>/-- Pattern #9: Action Flash</i>	1
ZZ-ZZ-ZZZZ		<i>/--</i>	1
05-PH-LJ01		<i>/-- Primary Grille lights, Dodge on Grille</i>	1
05-PL-LT15		<i>/-- (2) Grille Lights: Whelen Wide Angle ION series, LED, Chrome Flange</i>	1
05-PL-LZ13	S <	<i>/-- (2) RED/WHITE ION Series, Wide Angle LED, Surface Mount, ILOS</i> Whelen # WIONSMCD	1
Program #44 Action Flash 50			
05-FS-1212	S	<i>/-- Programmable Lights Split Color</i>	1
05-PL-LX00		<i>/-- Lens color for Above LED Light to be: Clear</i>	1
05-PL-LY74		<i>/-- LED Color for Above ION Series LED : RED/WHITE</i>	1
05-PH-LT28		<i>/-- (2) Front Intersection, Whelen LINZ6, SLED, Chrome Flange</i>	1
05-PM-LRN5	S <	<i>/-- Light, Whelen LINZ6, RED/WHITE S-LED, Chrome Flange</i> NOTE: Red to the Rear	2
Program #44 Action Flash 50			

PART NO	S	DESCRIPTION	QTY
05-FS-1212	S	-- Programmable Lights Split Color	2
05-PL-LX00		-- Lens color for Above LED Light to be: Clear	2
ZZ-ZZ-ZZZZ		--	1
05-PL-LU30		-- (1) Center Front Warning Light : Whelen 900 (Super LED)	1
05-PH-LS0H		-- Flange: (1) 900-Chrome Flanges for light above	1
05-PL-LXF1		-- Light: Whelen 900, Super WHITE LED/CLEAR LENS, Programmable ILOS	1
05-PL-LX00		-- Lens color for Above LED Light to be: Clear	1
05-PL-LXZ1		-- LED Color for Above 900 Super LED: WHITE	1
25-PH-LT84		-- LED Lights: Programmable, Single Light	1
ZZ-ZZ-ZZZZ		--	1
05-PL-LU40		-- (2) Front Warning Lts: Whelen 900, (Super LED)	1
05-PH-LS0A		-- Flanges: (2) 900-Chrome Flanges for lights above	1
05-PL-LXF3		-- Light: Whelen 900, Super RED LED/CLEAR LENS, Programmable ILOS	2
05-PL-LX00		-- Lens color for Above LED Light to be: Clear	2
05-PL-LXZ2		-- LED Color for Above 900 Super LED: RED	2
25-PH-LT84		-- LED Lights: Programmable, Single Light	2
ZZ-ZZ-ZZZZ		--	1
05-PL-LU50		-- (4) Side Warning Lts: Whelen 900, (Super LED)	1
05-PH-LS0F		-- Flanges: (4) 900-Chrome Flanges for lights above	1
05-PL-LXF3		-- Light: Whelen 900, Super RED LED/CLEAR LENS, Programmable ILOS	4
05-PL-LX00		-- Lens color for Above LED Light to be: Clear	4
05-PL-LXZ2		-- LED Color for Above 900 Super LED: RED	4
25-PH-LT84		-- LED Lights: Programmable, Single Light	4
ZZ-ZZ-ZZZZ		--	1
05-PL-LU51		-- (2) Rear Intersection Lts : Whelen 700, (Super LED) IATS	1
05-PH-LS08		-- Flanges: (2) 700-Chrome Flanges for lights above	1
05-PH-LT5A	S	-- Locations: (1) Street Side Above M2.5 Height, (1) C/S to Match Height	1
05-PL-LXK3		-- Light: Whelen 700, Super RED LED/CLEAR LENS, Programmable ILOS	2
05-PL-LX00		-- Lens color for Above LED Light to be: Clear	2
05-PL-LXY1		-- LED Color for Above 700 Super LED: RED	2
25-PH-LT84		-- LED Lights: Programmable, Single Light	2
06-SW-0022		-- Rear Intersection Lights Switched: PRIMARY / SECONDARY	1
ZZ-ZZ-ZZZZ		--	1
05-PL-LU60		-- (2) Rear Warning Lts: Whelen 900, (Super LED) ilos	1
05-PH-LS0A		-- Flanges: (2) 900-Chrome Flanges for lights above	1
05-PH-LT6A		-- Location: REAR, (1) in EACH Upper outer corner.	1
05-PL-LXF3		-- Light: Whelen 900, Super RED LED/CLEAR LENS, Programmable ILOS	2
05-PL-LX00		-- Lens color for Above LED Light to be: Clear	2
05-PL-LXZ2		-- LED Color for Above 900 Super LED: RED	2
25-PH-LT84		-- LED Lights: Programmable, Single Light	2
ZZ-ZZ-ZZZZ		--	1
05-PL-LU62		-- (4) Rear Warning Lts: Whelen 900, (Super LED), IATS	1
05-PH-LS0F		-- Flanges: (4) 900-Chrome Flanges for lights above	1
05-PH-LT6C	S	-- Location: REAR, (2) aligned w/Upper Rear Warning Lights.	1
05-PH-LT6C	X	-- Location: REAR, (1) aligned w/ EACH upper window in RA doors.	1
05-PL-LV13	S <	-- Light: Whelen 900, Super RED LED/CLEAR LENS, Programmable IATS	2
		Location: Red Lights aligned w/Upper Rear Warning Lights.	
05-PL-LX00		-- Lens color for Above LED Light to be: Clear	2
05-PL-LXZ2		-- LED Color for Above 900 Super LED: RED	2
25-PH-LT84		-- LED Lights: Programmable, Single Light	2
05-PL-LXG9	S <	-- Light: Whelen 900, Super RED/AMBER LED/CLEAR LENS, Programmable ILOS	2
		Location: Red/Amber Lights aligned w/ EACH upper window in RA doors With Red on Top and Amber on Bottom.	
05-FS-1212	S	-- Programmable Lights Split Color	2
05-PL-LX00		-- Lens color for Above LED Light to be: Clear	2
05-PL-LXZ7		-- LED Color for Above 900 Super LED: RED/AMBER	2
ZZ-ZZ-ZZZZ		--	1
05-PL-LU70		-- (1) Rear Center Warning Lt: Whelen 600, (Super LED) ILOS	1
05-PH-LS0K		-- Flange: (1) 600-Chrome Flanges for lights above	1
05-PL-LXH7		-- Light: Whelen 600, Super AMBER LED/CLEAR LENS, Program ILOS	1
05-PL-LX00		-- Lens color for Above LED Light to be: Clear	1
05-PL-LXX2		-- LED Color for Above 600 Super LED: AMBER	1

PART NO	S	DESCRIPTION	QTY
25-PH-LT84		/-- LED Lights: Programmable, Single Light	1
ZZ-ZZ-ZZZZ		/--	1
ZZ-ZZ-ZZZY		/--	1
ZZ-ZZ-ZZZZ		/--	1
05-ZZ-ZZZZ			1
S	<	ELECTRICAL - CELL 3	1
		NOTE: Run Wires Through M1 Access Panel and Under Cab to Console for Cleaner Look	
		NOTE: Install a Breaker List On Electrical Cabinet Door with a Lexan Cover over List. Reference Photo on File.	
		NOTE: Install Breaker Box and All Electrical Components in M2 on Ceiling or Wall Up High	
06-00-0005	S	< /-- Customer Supplied Part(s) : Yes See account	1
		1) Customer Supplied Radio Cable	
		2) Customer Supplied Havis Computer Mount	
07-00-0182		/-- Custom design wood console included in Order	1
06-00-0001			1
06-AA-0305		/-- Headlight Flasher; Program Chassis code - Switch or Icon to activate	1
05-IL-2035		Pre-wire, (1), For Customer Installed Rechargeable Flashlight,	1
05-IL-10L3	S	/-- Location: M-2 Compartment Upper Corner Near Wall #1	1
05-IL-10P0		/-- Powered: 12v Constant Hot	1
ZZ-ZZ-ZZZZ		/--	1
06-AL-47SU		Hand Held Spot Light: None	1
06-AM-SAHN	S	/-- AEV Traumahawk Telematics Declined, Not required	1
06-BA-3B40		Batteries: 2 - Battery System - Type I Gasoline Chassis only	1
02-B0-B002	S	< /-- Diamond Plate Cover Around Battery in M7 Compartment	1
		NOTE: Install In M7 For Second Battery Near Wall #3 and Install Vent on Wall #3 Behind Diamond Plate Cover for Battery to Vent.	
06-BA-3F55	S	/-- Batteries: (1) Underhood, (1) in M-7 (Type I Gasoline)	1
06-BA-3FE0	S	< /-- Battery Make: (2) 1 OEM + (1) Group 31	1
		One OEM battery under the hood OEM location	
		One additional battery at designated location,	
06-BA-3FM1		/-- Batt Loc: (T3) (1) Underhood, Remainder Batt M-8	1
06-BA-3FJA	<	/-- Battery Make: (1) Group 31 Heavy Duty	1
		Battery Brand must match.	
06-BA-Q631	XS	< /-- Battery Switch: Cole Hersee 2484-16 Paddle, T1 center console	1
		Cole Hersee Paddle style battery switch powers up and shuts down the CONVERSION only! Chassis related circuits shall remain wired in the OEM configuration per Ford QVM Bulletin No 63.	
		SWITCH LOCATION: Drivers' side of center cab console to be as close to the floor as possible	
06-BA-3FW4		/-- Batteries Wired: Parallel for higher amperage	1
ZZ-ZZ-ZZZZ		/--	1
06-EC-0568		PWR Door Locks: Module Doors - Full Mod T1	1
06-EC-0505	<	/-- Door Locks, Tied into OEM System	1
		Module power locks are tied to the Chassis power lock system	
06-EC-0512	<	/-- OEM Key Fob: Included w/Chassis Unlock Mod Doors	1
		Must also operate the Module Power Door Locks Optioned.	
06-EC-05C9		/-- Door Lock Switches : Integrated in Interior Entry door Handles	1
06-EC-05K0		/-- ONLY the following doors shall have power door locks:	1
06-EC-05M1		/-- Electric Door Lock: (M-1) Left Front Compartment	1
06-EC-05M2		/-- Electric Door Lock: (M-2) Left Middle Compartment	1
06-EC-05M3		/-- Electric Door Lock: (M-2.5) Left Wheel Well Compt.	1
06-EC-05M4		/-- Electric Door Lock: (M-3) Left Rear Compartment	1

PART NO	S	DESCRIPTION	QTY
06-EC-05M6		/-- Electric Door Lock: Rear Access Doors	1
06-EC-05M7		/-- Electric Door Lock: (M-5) Right Rear Compartment	1
06-EC-05N0		/-- Electric Door Lock: Curbside Access Door	1
06-EC-05N1		/-- Electric Door Lock: (M-7) Right Front Compt	1
06-EC-2800		< Door Unlock Switch, Momentary, Exterior, hidden	1
		NOTE: Installation of Remote Door Lock Switch feature may increase likelihood of unauthorized entry into vehicle. By checking this option, purchaser further agrees to hold REV or chassis manufacturer harmless for any loss of vehicle or contents caused by unlawful access.	
06-EC-0802	S	/-- Location: Under Front Street Side Corner of Box Under M1 Compartment	1
ZZ-ZZ-ZZZZ		/--	1
06-EC-CBZ4	S	< Circuit Board, 12V: Multiplex LX1 Dodge 4/5500 ILOS	1
		Includes the Following Items, please add to order:	
		All the following need to be added as usual:	
		Rear Digital Thermostat/Control for A/C, includes front also	
		Door Open 15, minute check out timer for 15	
		Oxygen Contents Gauge front and back	
06-EC-1304		/-- Voltage Monitor, LX-1, w/ Warning Light	1
06-EC-31F6	S	< /-- Back Up Camera: Installed Ext over Rr Doors - VCAHD140i (White Camera)	1
		This camera is a fixed position camera.	
		NOTE: Mount Centered Over Rear Doors Under Third Brake Light	
06-EC-31G0		/-- Camera Color: White	1
06-EC-31FH		/-- LX-1 Right Turn Camera displays in front LX1 panel	1
06-EC-31J2		/-- Right Turn Signal Camera: VCMS36RCM ASA, Chrome	1
06-EC-CB07		/-- Circuit Protection, 12V: FET - Auto-reset	1
06-EC-SPA7		/-- LX1 Main Switch Panel Location :	1
06-EC-SPB0	S	< /-- ABS Bezel Mount, Overhead, In Cab	1
		Reference 19OD 24809-12G	
06-EC-SPZ0		/-- Patient Area LX1 Panel:	1
06-EC-SPZ1		/-- Pt Area LX1 Switch Panel: One Standard In Patient Compartment	1
06-EC-SPA3		/-- Switch Panel Located: Curbside	1
06-EC-SP70	S	/-- Patient area switch panel mounted :C/S Action Area	1
06-FS-1106		/-- Sequencer, LX1, with load manager,	1
06-RR-240X	S	< /-- Type I - CAB Wood Console: Pass Thru - 14" OAW Standard.	1
		NOTE: Angle Front of Console With Siren Radio Space. Reinforce Passenger Side of Console for Customer Supplied Computer Mount.	
		NOTE: Install Vent on Front of Console and Not the Side	
		Reference Console Drawing on File	
		NOTE: Battery SWITCH LOCATION: Drivers' side of center cab console to be as close to the floor as possible	
		Front of console to be mounted 1" back from dash.	
		CONSOLE DRAWING APPROVED: 4-21-20	
06-RR-23J4	S	< /-- Door/Comp Ajar Buzzer: Activate with Entry & Compt Door	1
		Activate Only in Gear	
07-RR-24A0		/-- Console Finish: Black, Textured "Easy Grip"	1
07-RR-020F	S	< /-- Add-on Console: Type 1	1
		NOTE: WILL HAVE A PADDED TOP (ARM REST) OVER THE MAP BOOK AND GLOVE SECTION.	
07-RR-02A0		/-- Drink Holder: (2) In Add-on Console, Big Gulp Size	2
07-RR-02A6		/-- Drink Holder Location: Middle	2
07-RR-02E0		/-- Note Book Slot: Single - Full width by 4" wide	1

PART NO	S	DESCRIPTION	QTY
07-RR-02E1		/-- Divider(s): NONE	1
07-RR-2300	S <	/-- Space for Customer Laptop Pedestal on Console	1
		NOTE: Reinforce Console on Passenger Side Front Corner For Customer Installed Laptop Pedestal mount	
07-RR-2355		/-- Glove Storage: (4) Glove Box Storage Across Rear of add on console	1
07-RR-24A0		/-- Console Finish: Black, Textured "Easy Grip"	1
07-ZZ-ZZZZ	S <	/-- Install Customer Supplied Havis Computer mount in console	1
		Mount inside front console. To be mounted to the side of console on inside.	
		Notch to be cut in front right hand side of console top to allow pole to come through top. (Reference 19OD 24809-12G)	
07-ZZ-ZZZZ		/--	1
06-EC-4300		Back-up Alarm: Standard 102DB	1
06-EC-43C0		/-- Cut Off Switch: NONE	1
06-EC-GR01		Ground Straps, Module to Frame: (Qty 4) Braided	1
06-IA-0001		Converter , 125V to 12V: NONE	1
06-IG-0310		Inverter : Vanner 20-1050 CUL-DC - Full Mod	1
06-EC-03AS		/-- Portable Equip Charging Circuits: Included in Inverter	1
06-EC-03AA		/-- PREWIRE LOCATION: (1)Cab Console, (1) Behind A/A	1
06-EC-03C9	<	/-- Portable Equip Pwr Source: Ignition and/or Shoreline	1
		Reference 3.7.7.2 and Figure 7 in KKK-A-1822E	
06-IG-03A0		/-- Battery Charger/Conditioner: 55A - Built into Inverter	1
06-IG-0003		/-- Built-in Battery Charger: Enable - Wire to Batteries	1
06-IG-04L0		/-- Inverter Location: M-2 (LFM) Compartment	1
06-IG-04M0	S	/-- On Ceiling	1
06-IG-04C0		/-- Lexan Cover: Over Inverter	1
ZZ-ZZ-ZZZZ		/--	1
		COMMUNICATION RADIO(S) RELATED	1
06-00-0001		/--	1
		RADIO POWER	1
06-EC-03A0	S <	/-- Radio Power No 1: 30A, Pos and Neg, 10 awg Wires	1
		Hot and ground wire	
		To run out of 2" Conduit	
06-EC-03C0		/-- Radio Power Source: Battery (Constant) Hot	1
06-EC-03G0	S	/-- LOCATION: Radio Cabinet On Side of ALS	1
06-EC-03A2	S <	/-- Radio Power No 2: 30A, Pos and Neg, 10 awg Wires	1
		Hot and ground wire	
		To run out of 2" Conduit	
06-EC-03B0		/-- Radio Power Source: Battery Switch Hot	1
06-EC-03E0	S	/-- LOCATION: Radio Cabinet On Side of ALS	1
		ANTENNA LEADS	1
06-RR-1710	<	/-- Antenna Base w/ Coaxial Cable: KE794 #1	1
		MOUN-KE794	
06-RR-1760	<	/-- Roof Location: Roof Port #1	1
		MOUN-K794	
		Line up with edge of curbside entry door, centered side to side as near as possible.	
06-RR-1776	S <	/-- LOCATION: Radio Cabinet On Side of ALS	1
		MOUN-K794	
06-RR-1712	<	/-- Antenna Base w/ Coaxial Cable: KE794 #2	1
		MOUN-KE794	
06-RR-0102	<	/-- ORIENTATION POINT: Roof Port No 2	1
		Roof Port No 2 is located approximately 24 inches back rearward of roof port #1.	

PART NO	S	DESCRIPTION	QTY
06-RR-01P0		/-- Port Plate: None - Access thru center upholstery panel	1
06-RR-1774	S <	/-- LOCATION: Radio Cabinet On Side of ALS MOUN-K794	1
06-RR-1100	S <	/-- Radio Cable, Customer Supplied prior to production, Installed Run cable through 2" conduit from center console to Second radio storage Cabinet on ALS	1
06-RR-1809		/-- Patient Area Radio : None	1
06-SO-0000		125V SHORE LINE AND OUTLETS	1
06-00-0001		/--	1
06-SO-0500	S <	/-- Shore Line Inlet: 20A Super Auto Eject, ILOS Label: "Battery Charger"	1
06-SO-00L1	S <	/-- Inlet location: Front of Module Driver Side Recessed in Body NOTE: Shorelines to be Recessed in Front of Body as Much as Possible.	1
06-SO-0801	S <	/-- Indicator Light, Shore line: Weather proof, power by SL, Green Indicator light located above shore line inlet. 1 Light showing power coming in 1 Light showing power on outlets	1
06-SO-0811	S <	/-- Additional Ind Light, Shore line: Weather proof, power by SL, Green Indicator light located above shore line inlet. 1 Light showing power coming in 1 Light showing power on outlets	1
06-SO-1005		/-- Cover, Yellow, Shore Line Inlet : 20A Super Auto Eject, STD	1
ZZ-ZZ-ZZZZ		/--	1
06-SO-10TT	S <	/-- Inpower Timer: VCM-05-01SF, Installed NOTE: Special Request to Eject on Start/Run Crank ILOS (See Quincy)	1
06-SO-0400	S <	/-- Shore Line Inlet No 2: 20A Super Auto Eject, IATS Label: "Danhard A/C"	1
06-SO-00L2	S	/-- Inlet location: Front of Module Driver Side Recessed in Body	1
06-SO-0801	<	/-- Indicator Light, Shore line: Weather proof, power by SL, Green Indicator light located above shore line inlet.	1
06-SO-1020		/-- Cover, Blue, Shore Line Inlet : 20A Super Auto Eject, ILOS	1
ZZ-ZZ-ZZZZ		/--	1
06-SO-1400		/-- **125 Volt OUTLETS**	1
06-SO-1401	<	/-- 125 VAC Outlet, No 1: 15A, Hospital Grade, IVORY All 125 VAC outlets shall be back lighted when power is applied to the outlet.	1
06-SO-14L1	S	/-- LOCATION: Bottom of Electrical Cabinet Facing Rear of Truck (See Drawing)	1
06-SO-1402		/-- Outlet mounting ORIENTATION: Vertical	1
ZZ-ZZ-ZZZZ		/--	1
06-SO-1402		/-- 125 VAC Outlet, No 2: 15A, Hospital Grade, IVORY	1
06-SO-14L3	S	/-- LOCATION: Extended Action Area (See Drawing)	1
06-SO-1402		/-- Outlet mounting ORIENTATION: Vertical	1
ZZ-ZZ-ZZZZ		/--	1
06-SO-1403		/-- 125 VAC Outlet, No 3: 15A, Hospital Grade, IVORY	1
06-SO-14L4	S	/-- LOCATION: Curbside Action Area (See Drawing)	1
06-SO-1402		/-- Outlet mounting ORIENTATION: Vertical	1
ZZ-ZZ-ZZZZ		/--	1
06-SO-1404		/-- 125 VAC Outlet, No 4: 15A, Hospital Grade, IVORY	1
06-SO-14L4	S	/-- LOCATION: Curbside Rear, see Drawing	1

PART NO	S	DESCRIPTION	QTY
06-SO-1402		/-- Outlet mounting ORIENTATION: Vertical	1
ZZ-ZZ-ZZZZ		/--	1
06-SO-1405		/-- 125 VAC Outlet, No 5: 15A, Hospital Grade, IVORY	1
06-SO-14L5	S	/-- LOCATION: RF ALS, Below Top Shelf (See Drawing)	1
06-SO-1402		/-- Outlet mounting ORIENTATION: Vertical	1
ZZ-ZZ-ZZZZ		/--	1
06-SO-1406		/-- 125 VAC Outlet, No 6: 15A, Hospital Grade, IVORY	1
06-SO-14L7	S <	/-- LOCATION: Cab Console on Front	1
NOTE: Install on Front of Cab Console Near Bottom and Will be Mounted Toward Passenger Seat But Far Enough Over Not to Interfere With Computer Mount Bolts.			
06-SO-1402		/-- Outlet mounting ORIENTATION: Vertical	1
ZZ-ZZ-ZZZZ		/--	1
06-SO-1407		/-- 125 VAC Outlet, No 7: 15A, Hospital Grade, IVORY	1
06-SO-14L3	S	/-- LOCATION: RF ALS, Exact Location TBD	1
06-SO-1402		/-- Outlet mounting ORIENTATION: Vertical	1
ZZ-ZZ-ZZZZ		/--	1
06-SO-1408		/-- 125 VAC Outlet, No 8: 15A, Hospital Grade, IVORY	1
06-SO-14L7	S	/-- LOCATION: Extended Action Area Beside Suction (See Drawing)	1
06-SO-1402		/-- Outlet mounting ORIENTATION: Vertical	1
ZZ-ZZ-ZZZZ		/--	1
06-SO-1409		/-- 125 VAC Outlet, No 9: 15A, Hospital Grade, IVORY	1
06-SO-14L7	S	/-- LOCATION: Extended Action Area Beside Suction (See Drawing)	1
06-SO-1402		/-- Outlet mounting ORIENTATION: Vertical	1
ZZ-ZZ-ZZZZ		/--	1
06-SO-1100		**INTERIOR 12 Volt OUTLETS**	1
06-SO-10XZ		/-- 12 Volt outlets two separate single outlets	1
06-SO-10Y0		/-- 12V Outlet, No 1: Power Point Single - Wire thru Med Isolator	1
06-SO-11L1		/-- LOCATION: Action Area, standard location	1
06-SO-1402		/-- Outlet mounting ORIENTATION: Vertical	1
06-SO-1910		/-- Power Source: Medical Isolator , Batt Sw Hot	1
ZZ-ZZ-ZZZZ		/--	1
06-SO-1102		/-- 12V Outlet, No 2: Power Point - Wire thru Med Isolator	1
06-SO-11L1	S	/-- LOCATION: Extended Action Area (See Drawing)	1
06-SO-1402		/-- Outlet mounting ORIENTATION: Vertical	1
06-SO-1913		/-- Power Source: The SAME as outlet No 1	1
ZZ-ZZ-ZZZZ		/--	1
06-SS-020D		Siren: Federal, EQ2B, Dodge, ILOS	1
06-SS-FC16	<	/-- Siren Spkr: CPI, Thru the Bumper SAD/P3821-19 - D35/45/5500 ILOS 2019+ This speaker is a surface mounted siren speaker.	1
06-SS-SW01	<	/-- Siren / Horn Switch: In Cab Console Siren Functions OR OEM Horn	1
06-SS-SW04		/-- microphone clip not installed Tie to Siren Microphone cord. CABINET SHOP - Modular	1
07-00-0182		/-- Custom design wood console included in Order	1
ZZ-ZZ-ZZZZ		/--	1
07-00-0001	<	ALL DIMENSIONS ON ORDER WILL HAVE A VARIABLE OF + OR - 1/4" Unless specified as a minimum dimension.	1
ZZ-ZZ-ZZZZ		/--	1
07-00-MC83	S <	Mica Colors: Gloss White over Stainless Steel Parting Line: C/S: Top of squad bench S/S: To A/A Counter. Stainless Steel on above areas only. No other cabinet gets stainless, unless specified otherwise below.	1
07-AS-1200	S <	/-- Stainless Steel - FACE of Squad Bench End of squad bench shall be MICA.	1
07-AS-1400		/-- Stainless Steel - Lower Face of Wall Cabinet - Included	1
ZZ-ZZ-ZZZZ		/--	1
07-00-PC0P	<	Polycarbonate Type/Color: Lexan - Gray Secure Latch Note; For any secure latch window requested where a cabinet opening width is 20 inches or less, the secure latch window will be questioned at ordering.	1

PART NO	S	DESCRIPTION	QTY
07-00-PH01		<i>/-- Window Handles: Full Length Extruded</i>	1
07-01-SEK5	<	<i>/-- Att. Seat: EVS, 1880P4B 10 deg Child Safety Seat ,Dove Per4Max Black, ARMRESTS are permitted on this seat SEAT-LOGO AEV REV (or can be deleted) Seat back angle fixed, no recline function. Child safety seat</i>	1
07-SE-0901	<	<i>/-- BASE: Swivel base for EVS Child Seat Option Handle on RIGHT std (2) Position Swivel, Forward or Rearward, Only BASE-1882S EVS handle is on right.</i>	1
11-SE-04A0		<i>/-- Attendant Seat, Armrest: None</i>	1
07-AC-4401		AC CABINET: Evaporator, Std Location Behind Att Seat	1
07-ZZ-ZZZZ		<i>/--</i>	1
07-BH-4801		LF Cabinet, Behind Att Seat: Cabinet "H"/ (Elec Cab)	1
07-CA-VEN7		<i>/-- Plastic Vent: (2) Total, 1 column x 8 row, Vent 01</i>	1
07-DR-WD0E		<i>/-- Door, Single Solid Flush Fitted Electrical Area</i>	1
07-CA-2100		<i>/-- TRIM: U-shaped Door, J-trim opening</i>	1
07-DR-OR04		<i>/-- Hinge Orientation: RIGHT</i>	1
07-HW-HIN1		<i>/-- Hinge: 1 1/2" Stainless Steel Piano Hinge</i>	1
07-HW-SO04	<	<i>/-- Lever Latch: Non-locking - Black Finish Non Storage areas, no rating applied SAE Compliant latch, tested. No storage rating applied to this area.</i>	1
07-ZZ-ZZZZ		<i>/--</i>	1
07-CA-04A8		<i>Cabinet, (3) Glove Storage, over C/S Entry Door</i>	1
07-DR-LX04		<i>/-- Door: Overlay He, 3/8" Lexan - 3-glove dispense thru</i>	1
07-HW-SO11		<i>/-- Round Pull Latch: Non-locking - Chrome Finish</i>	1
11-X0-0010		<i>/-- Stowage rating label - Southco round latch 10 pounds applied each</i>	1
07-ZZ-ZZZZ		<i>/--</i>	1
07-CA-03B0	S <	<i>Curbside Action Area and Storage Cabinet NOTE: Angled C/S Action Area Cabinet for LX1 Switch Panel, (1) 125 Outlet with Storage Cabinet Above Switch Panel. Storage Cabinet to be Minimum of 15" Wide x 10" High x 8" Deep</i>	1
07-DR-WD01		<i>/-- Door, Single Solid Flush Fitted</i>	1
07-CA-2100		<i>/-- TRIM: U-shaped Door, J-trim opening</i>	1
07-DR-OR02		<i>/-- Hinge Orientation: BOTTOM</i>	1
07-HW-HIN1		<i>/-- Hinge: 1 1/2" Stainless Steel Piano Hinge</i>	1
07-HW-SO11		<i>/-- Round Pull Latch: Non-locking - Chrome Finish</i>	1
11-X0-0010		<i>/-- Stowage rating label - Southco round latch 10 pounds applied each</i>	1
10-EC-2932	<	<i>/-- Mermaid Cam Lock: Install (1) Cam Lock on solid cabinet door Part LOCK-MEDECO2</i>	1
ZZ-ZZ-ZZZY		<i>/--</i>	1
07-ZZ-ZZZZ		<i>/--</i>	1
07-CA-0400		<i>CURBSIDE REAR: Rear of S/B, Mods</i>	1
07-CU-K103		<i>/-- Cabinet L : (1) Opening with (1) Adj shelf, shelf std.</i>	1
07-DR-LX24	S	<i>/-- Doors: Dual 3/8" Lexan (1) Hinged Left and (1) Hinged Right</i>	1
07-HW-SO11		<i>/-- Round Pull Latch: Non-locking - Chrome Finish</i>	2
11-X0-0010		<i>/-- Stowage rating label - Southco round latch 10 pounds applied each</i>	2
07-ZZ-ZZZZ		<i>/--</i>	1
07-RF-4404		RF ALS Cabinet: Std T-1	1
07-RF-CADR		<i>/-- Check the specified Walk through Door type (Station 5)</i>	1
07-RF-I148		<i>/-- Cabinet I-1: Standard</i>	1
07-DR-WD01	S <	<i>/-- Door, Single Solid Flush Fitted NOTE: Install Gas Shock on Door</i>	1
07-CA-2100		<i>/-- TRIM: U-shaped Door, J-trim opening</i>	1
07-DR-OR01		<i>/-- Hinge Orientation: TOP</i>	1
07-HW-HIN1		<i>/-- Hinge: 1 1/2" Stainless Steel Piano Hinge</i>	1
07-HW-SO11		<i>/-- Round Pull Latch: Non-locking - Chrome Finish</i>	1
11-X0-0010		<i>/-- Stowage rating label - Southco round latch 10 pounds applied each</i>	1

PART NO	S	DESCRIPTION	QTY
10-ME-L300	<	/-- Lock, Compx-E, Model 300 w/ Proximity Card/Keypad Combo Model 300 COMPX- WS-PRKP-CAB Networkable for a dry cabinet installation Wi Fi, Keypad, with HID proximity sensor Includes one proximity card = card-proxy Uses AA size batteries, has a 9v battery jump point for low battery opening.	1
10-ME-L350	<	/-- CompX, 12V DC Power Converter: Installed LOCK-MA2699	1
10-ME-LOOC	S	/-- Lock install location: I-1 Cabinet Door	1
10-ME-SOFW	<	/-- Software, Compx-E Lock EL-LOCKVIEW-5PRO for 300 series locks ship loose; Model EL-LOCKVIEW-5 PRO Includes TWO license. Includes install CD, USB Dongle & RJ11 Cable	1
ZZ-ZZ-ZZZZ		/--	1
07-ZZ-ZZZZ		/--	1
07-RF-I248	S <	/-- Cabinet I-2: Custom NOTE: Bottom Floor Level Fixed Shelf and Bottom Fixed Shelf in I2 on M7 Side Will Not Have a Lip Facing the M7 Door.	1
04-TS-14M3	S <	/-- Divider, Vertical, Full compartment height, Fixed NOTE: Full Depth and full height of ALS and divider placed to allow for a 12" deep and 14" wide radio cabinet on side of ALS cabinet. There will be two adjustable shelves on each side of divider in I-2 cabinet.	1
07-DR-WD04		/-- Doors, Double Solid, Flush Fitted: W/ Lexan Insert	1
07-CA-21A0		/-- TRIM: U-shaped Door, J-trim opening, DBL DRS	1
07-DR-OR05		/-- Hinge Orientation: (1) RIGHT and (1) LEFT	1
07-HW-HIN1		/-- Hinge: 1 1/2" Stainless Steel Piano Hinge	2
07-HW-SO12		/-- Round Pull Latch: Locking - Chrome Finish	2
11-X0-0010		/-- Stowage rating label - Southco round latch 10 pounds applied each	2
07-RA-IOA1		/-- Outside Access: Thru M-7 (RF) Compartment door.	1
07-RF-0002		/-- Interior Material and Color: To be Color Keyed Laminate	1
07-TS-1200		/-- Shelf Track: Small alum Unistrut type	1
07-CA-0608	S	/-- (2) Shelves: Adjustable mica over substrate with Alum Trim	1
ZZ-ZZ-ZZZZ		/--	1
07-RF-I348		/-- Cabinet I-3: Standard, 15" High	1
07-DR-WD25		/-- Door, Single Solid, Flush - Drug Locker	1
07-CA-2100		/-- TRIM: U-shaped Door, J-trim opening	1
07-DR-OR02		/-- Hinge Orientation: BOTTOM	1
07-HW-HIN1		/-- Hinge: 1 1/2" Stainless Steel Piano Hinge	1
07-HW-SO12		/-- Round Pull Latch: Locking - Chrome Finish	1
11-X0-0010		/-- Stowage rating label - Southco round latch 10 pounds applied each	1
07-RA-IOA1		/-- Outside Access: Thru M-7 (RF) Compartment door.	1
07-RF-0002	S	/-- Interior Material and Color: To be Color Keyed Laminate	1
07-ZZ-ZZZZ		/--	1
07-RF-I401	S <	/-- Cabinet I-4: Custom Radio Storage Cabinet on Side of ALS NOTE: Opening to be 14" Wide	1
07-DR-WD00		/-- Door, Single Solid, Flush Fitted	1
07-CA-2100		/-- TRIM: U-shaped Door, J-trim opening	1
07-DR-OR03		/-- Hinge Orientation: LEFT	1
07-HW-HIN1		/-- Hinge: 1 1/2" Stainless Steel Piano Hinge	1
07-HW-SO11		/-- Round Pull Latch: Non-locking - Chrome Finish	1
11-X0-0010		/-- Stowage rating label - Southco round latch 10 pounds applied each	1
07-RF-0001	S	/-- Interior Material and Color: To be Color Keyed Laminate	1
07-ZZ-ZZZZ		/--	1
07-RR-0048		Right Rear Cabinet: Cover over M-5compartment	1
07-ZZ-ZZZZ		/--	1
07-SA-0000			1

PART NO	S	DESCRIPTION	QTY
07-SB-4401	S <	< SQUAD BENCH: Custom Layout From Front to Rear: 1. Front Cabinet J1 in face of Bench with three drawers. Install Upholstery Pads over front and rear Corner of the top of Cabinet 2. Middle Seating Position 3. Rear- Seating Position	1
07-DW-0012	S <	/-- Cabinet J-1 Drawers: (3) Mica-wood body, Mica inside and out NOTE: (3) Drawers will open towards the aisle, total height of the drawer section will be approx. 30.25" H and the total width will be approx 20" wide. Install CPR style rounded padded arm rest on the top of the cabinet on bench side and C/S door side . Install drop in style sharps container in top of cabinet recessed behind drawers. Sharps box dimensions are 11" h x 4.25" d x 10.25" w. NOTE: Bottom drawer to pull out the same length as upper 2 drawers	1
07-DR-WD15		/-- Drawer Front: Flush Fitted	3
07-CA-2100		/-- TRIM: U-shaped Door, J-trim opening	3
07-DR-WSD1		/-- Drawer Front: Flush Fitted with 12" secure latch at top	3
11-X0-0048		/-- Stowage rating label Secure Latch 12" Single Handle on Door 40 pounds applied	3
07-HW-SL01		/-- Drawer Slides: Full Extension, Detachable 130 LB capacity STD	3
07-SB-0001		/-- See Upholstery Section for Post and Wheel Cup info	1
07-SB-1002	S	/-- Sharps No 1: Gray ABS Rim, Recessed in Top of Cabinet J1	1
07-SB-1003		/-- LOCATION: At head of Squad Bench	1
07-SB-1011		/-- SHARPS CONT. 5-Quart Kendall # 85131	1
07-SB-1001	S	/-- Storage Under Lid - Configure to M-5 Compartment Size	1
07-SB-LID2	S <	/-- Squad Bench Lids: Split - 2-section NOTE: Rear Section is Fixed Over M5 Compartment	1
07-SB-LH00		/-- Hinge, Squad Bench Lid(s): Butt Style Hinges	1
07-SB-LH03		/-- Lid Checks: Gas shock, Dual Action	2
07-SB-LH07		/-- Latch, Squad Bench Lid: Slam Action Paddle, W keeper	2
11-X0-0030		/-- Stowage rating label - Squad bench interior, entire area 80 lbs	2
07-TR-SB01		/-- Edge Trim, Lids: Band w/ Laminate and J-Trim Protection	1
ZZ-ZZ-ZZZZ		/--	1
08-MH-1404		/-- Restraint Net, at head of S/B, NONE	1
08-ZZ-ZZZZ		/--	1
07-TC-0000			1
07-TC-6401		TOP CABINETS, - Standard	1
07-TC-A644		/-- Cabinet A: Standard	1
07-TS-1200		/-- Shelf Track: Small alum Unistrut type	1
07-CA-0608	<	/-- (2) Shelves: Adjustable mica over substrate with Alum Trim (1) Each side of Divider	1
07-CB-DR50		/-- Doors; Cabinet Secure Latch Restocking Sliding Window Top hinged	1
11-X0-0016		/-- Stowage rating label Secure Latch Restocking Sliding Window 30 pounds applied	1
07-ZZ-ZZZZ		/--	1
07-TC-B641	S	/-- Cabinet B1: Standard	1
07-TS-1200		/-- Shelf Track: Small alum Unistrut type	1
07-CA-0608	<	/-- (2) Shelves: Adjustable mica over substrate with Alum Trim (1) Each side of Divider	1
07-CB-DR31	S	/-- Doors; Cabinet B1 Secure Latch Restocking Sliding Window Top hinged	1
11-X0-0016		/-- Stowage rating label Secure Latch Restocking Sliding Window 30 pounds applied	1
07-ZZ-ZZZZ		/--	1
07-WC-C641	S	/-- Cabinet B2: Standard	1
07-TS-1200		/-- Shelf Track: Small alum Unistrut type	1
07-CA-0608	<	/-- (2) Shelves: Adjustable mica over substrate with Alum Trim (1) Each side of Divider	1
07-CB-DR31	S	/-- Doors; Cabinet B2 Secure Latch Restocking Sliding Window Top hinged	1
11-X0-0016		/-- Stowage rating label Secure Latch Restocking Sliding Window 30 pounds applied	1

PART NO	S	DESCRIPTION	QTY
07-ZZ-ZZZZ		/--	1
07-WC-D641	S	/-- Cabinet B3: Standard	1
07-TS-1200		/-- Shelf Track: Small alum Unistrut type	1
07-CA-0608	<	/-- (2) Shelves: Adjustable mica over substrate with Alum Trim (1) Each side of Divider	1
07-CB-DR37	S	/-- Doors; Cabinet B3 Secure Latch Restocking Sliding Window Top hinged	1
11-X0-0016		/-- Stowage rating label Secure Latch Restocking Sliding Window 30 pounds applied	1
07-ZZ-ZZZZ		/--	1
07-ZZ-ZZZZ		/--	1
07-WC-0000			1
07-WC-640L	S	WALL CABINET: No CPR Seat w/Extended Action Area	1
07-WC-AA01		/-- Action Area: Standard	1
07-WC-AS21	S <	/-- A/A Tray: Stainless Steel, with 3" Back splash LIPS: On all three sides and have a rear back splash. NOTE: S/S Tray Needs to be One Tray with 3" Back Splash Bent on Extended A/A Wall and in Front of A/A Board and the 3" Back Splash Will be Glued on Side of A/A Box.	1
07-WC-AA30		/-- Bio-waste/Sharps A/A: None	1
ZZ-ZZ-ZZZZ		/--	1
07-WC-AABD		/-- Action Area Board: Black Grip See Station No 6 for content	1
07-ZZ-ZZZZ		/--	1
07-WC-C641	S	/-- Cabinet C: Custom Recess for (3) Portable Oxygen Brackets	1
07-ZZ-ZZZZ		/--	1
07-WC-D003		/-- Cabinet D: DELETE	1
07-ZZ-ZZZZ		/--	1
07-WC-E003		/-- Cabinet E: DELETE	1
07-ZZ-ZZZZ		/--	1
07-WC-F000		/-- Cabinet F: DELETE	1
07-ZZ-ZZZZ		/--	1
07-WC-SS09		/-- CPR Side Seat: None, See Work Order for Specifics	1
ZZ-ZZ-ZZZZ		/--	1
07-WC-TA01	S	/-- Extended Action Area:	1
07-HW-IV01	S <	/-- IV POLE: 1 1/4" Diameter, S/S, In Action area NOTE: Install Pop Rivets in IV Pole On Back Side of Pole Facing Wall Cabinet (Wall #2 of Action Area)	1
ZZ-ZZ-ZZZZ		/--	1
07-WC-O101	S <	/-- Cabinet O1: Standard NOTE: Install Small Clear Bumper on O2 Viewing Window to Protect the O1 Cabinet Door.	1
07-TS-1200		/-- Shelf Track: Small alum Unistrut type	1
07-CA-0608	S	/-- (2) Shelves: Adjustable mica over substrate with Alum Trim	1
07-CB-DRLY		/-- Door: Single Overlay Lexan Hinged Right	1
07-HW-SO11		/-- Round Pull Latch: Non-locking - Chrome Finish	1
11-X0-0010		/-- Stowage rating label - Southco round latch 10 pounds applied each	1
ZZ-ZZ-ZZZZ		/--	1
08-SE-1702		/-- P4 - 4-Point PER4MAX Restraint System - with replacement indicator W/CPR	1
08-SE-1849	XS <	/-- (2) Per4max Belt on Squad Bench above bench, (0) Per4Max above CPR Side Seat Blac Belt retractors can mount above the seat Deck level, Install with brackets in kit	1
08-SE-SB70		/-- S/B: (3) Sec patient restraints - 9" Sleeves Face of Bench	1
08-SE-SB76		/-- S/B: (3) Sec patient restraints - 5" Sleeves By Hinge	1
00-20-0072		/-- Per4Max Four-Point Seatbelts: Accept and Install Full Feature	1
ZZ-ZZ-ZZZZ		/--	1
ZZ-ZZ-ZZZZ		/--	1
07-ZZ-ZZZZ		/--	1

PART NO	S	DESCRIPTION	QTY
CABINET SET - CELL 4 - MOD			1
08-00-00CP		Sub Floor, 3/4" Composite, ILOS	1
ZZ-ZZ-ZZZZ		/--	1
08-00-FL31		Flooring: Lonplate II - #424TX (Textured) Gun Powder	1
08-00-FL01		/-- Flooring Main Edge: 3" Recessed (1/2" deep) roll-up	1
08-AS-0001	<	/-- Rear Threshold, Stainless, 6" Wide x Full Width at rear doors Install safety yellow with diagonal stripes nonskid tape over threshold.	1
08-AS-0006		/-- C/S Stepwell Threshold, Polished Diamond Plate	1
ZZ-ZZ-ZZZZ		/--	1
08-ZZ-ZZZZ		/--	1
08-CS-0001		COT MOUNT HARDWARE: (Full Size Mod)	1
08-CR-0730	<	/-- Cot Mt Stryker Performance load & charger w/floor plate - mods SAE Performance load with inductive charger and floor plate SAE J3027 compliant Not Compatible with cots other than Stryker! This item priced for Domestic USA usage only. Compatible only with properly equipped cots to the performance load.	1
08-CR-09PN		/-- mass casualty kit not requested	1
08-CR-100P	<	/-- 12v power feed location CENTER for Stryker performance load w inductive charging 12volt power for power load to be brought through floor at center of the template for a Stryker Performance load with inductive charging. with Heat shrink connectors installed	1
08-CS-00C0	<	/-- Cot Position No 1: PRIMARY CENTER POSITION Maintain 12" between Cot and S/B.	1
08-CS-2000	<	/-- Primary Cot position under floor reinforcement Install 8 inch wide by 5 long 1/2" aluminum reinforcement at primary cot position. (Primary cot position only - REV Std) **If custom location is desired, must be specified below.	1
08-CS-19A5		/-- Cot Stop, Block: Stryker Power/Performance load. Install hook with kit	1
08-CS-3009		/-- Cot mount set up for: Stryker Power-Pro 6506	1
ZZ-ZZ-ZZZZ		/--	1
08-CS-19U1		/-- Q Straint System: NONE	1
08-OS-04ST		OXYGEN / AIR / VACUUM System:	1
08-OS-0401		/-- Oxygen Outlet No 1: Amico Console - Ohmeda/Ohio Diamond Style	1
08-OS-040A		/-- LOCATION: Action Area	1
08-OS-0402		/-- Oxygen Outlet No 2: Amico Console - Ohmeda/Ohio Diamond Style	1
08-OS-040A		/-- LOCATION: Action Area	1
08-OS-0403		/-- Oxygen Outlet No 3: Amico Console - Ohmeda/Ohio Diamond Style	1
08-OS-040D	S	/-- LOCATION: Curbside Wall, Above Cabinet J1 and Below C/S Action Area	1
08-ZZ-ZZZZ		/--	1
08-OS-0904	<	/-- Port Cyl Rack No 1: Zico QR-D-2 - D or Jumbo D - No Strap Req Through bolt the rack to metal.	1
ZZ-ZZ-ZZ01	S	/-- Location: Recessed In Cabint C Rear of Street Side Wall Cabinet	1
ZZ-ZZ-ZZZZ		/--	1
08-OS-0905	<	/-- Port Cyl Rack No 2: Zico QR-D-2 - D or Jumbo D - No Strap Req Through bolt the rack to metal.	1
ZZ-ZZ-ZZ01	S	/-- Location: Recessed In Cabint C Rear of Street Side Wall Cabinet	1
ZZ-ZZ-ZZZZ		/--	1
08-OS-0906	<	/-- Port Cyl Rack No 3: Zico QR-D-2 - D or Jumbo D - No Strap Req Through bolt the rack to metal.	1
ZZ-ZZ-ZZ01	S	/-- Location: Recessed In Cabint C Rear of Street Side Wall Cabinet	1
ZZ-ZZ-ZZZZ		/--	1
08-OS-1331	<	/-- Rack No 1: Adjustable AEV O2 Rack Green with 4 Ratchet Straps M/H Fits cylinders 7" diameter or more.	1
08-OS-11G1	<	/-- Cylinder Type: OXYGEN - Green Colored Hose Regulator connection Nut: 9/16" RH thread.	1


PART NO	S	DESCRIPTION	QTY
08-OS-1301	S	<i>/-- Rack Location: Left Front, wall #2 near Divider as Close as Possible</i>	1
08-OS-132M		-- Set up For M cylinder	1
08-OS-1712	XS <	<i>/-- Regulator, Oxygen: Has LX1 Transducer, Inspected and Installed</i>	1
		Installed on O2 line for pressure test,	
		Regulator and Transducer connected and left installed on Oxygen hose.	
		Tagged with Inspector signature/Date	
		Protected for shipment and left on the hose, Plastic restraint tie to the oxygen bracket for shipment	
		> Required under Change notice 11, July 1, 2018 .	
		02 Regulator to be visible from M1 Door	
		AEV to test volume with 02 tank installed	
08-OS-1902		-- Regulator Wrench: Cast aluminum, OXYGEN w/ cable lanyard	1
ZZ-ZZ-ZZZZ		--	1
08-OS-1332	<	<i>/-- Rack No 2: Adjustable AEV O2 Rack Green with 4 Ratchet Straps M/H</i>	1
		<i>Fits cylinders 7" diameter or more.</i>	
08-OS-11G1	<	<i>/-- Cylinder Type: OXYGEN - Green Colored Hose</i>	1
		<i>Regulator connection Nut: 9/16" RH thread.</i>	
08-OS-1301	S	<i>/-- Rack Location: Left Front, wall #3 near door jamb</i>	1
08-OS-132M		<i>/-- Set up For M cylinder</i>	1
08-OS-1755	<	<i>/-- Transducer, Additional, LX-1 system</i>	1
		TRAN-LX1	
08-OS-1900		-- Regulator Wrench: Cast aluminum, OXYGEN w/ cable lanyard	1
ZZ-ZZ-ZZZZ		--	1
08-OS-1400	<	<i>/-- Electric Oxygen, 12V solenoid valve w/ manual by-pass</i>	1
		<i>Location: In Action Area</i>	
08-OS-35ST	S <	<i>/-- Vacuum System: SSCOR regulator/gauge panel in A/A</i>	1
		NOTE: Suction Switch to be Located Beside SSCOR Gauge and Not in Action Area Board.	
08-OS-3501	<	<i>/-- Collection Canister w Clip: Bemis, 1200 CC Capacity -J3043 retention compliant</i>	1
		LOCATION: In Action Area, to the left of A/A console box.	
		with SSCOR canister retention clip	
08-OS-3502		-- VAC Plumbing: Direct from panel to canister - NO Outlet	1
08-OS-3503		-- Vacuum Pump: 49 State	1
08-OS-35L4	S	<i>/-- Location: M-2 Compartment on Ceiling Facing Front to back close to wall</i>	1
ZZ-ZZ-ZZZZ	2	--	1
ZZ-ZZ-ZZZZ		--	1
08-ZZ-ZZZZ			1
		TRIM / DOOR ASSEMBLY - CELL 5	1
09-00-002S		-- Interior window and aluminum trim with standard satin finish- std	1
09-00-0001			1
09-00-0002		*****DOOR DEPARTMENT - Full Mod*****	1
02-BT-C853	<	<i>/-- Handles, Ext: Tri-mark 030-1875, Free Float, Polished CNNC finish</i>	1
		Keyed 2002	
02-BT-C85A	<	<i>/-- Interior Release: All Entry Doors, with bezel Emergency Access</i>	1
		All three Entry Doors, top and bottom latches.	
		Bezel installed around emergency release.	
09-MH-253N		<i>/-- Rear Entry Assist Handle not required</i>	1
ZZ-ZZ-ZZZZ		--	1

PART NO	S	DESCRIPTION	QTY
09-B1-ED00		Entry Door Panels, Windows and Hardware	1
08-MH-0020		/-- Interior Grab Handle Color: Yellow Antimicrobial	1
08-MH-03B6		/-- Grab Handle, CS Entry: 1 1/4" Dia..... S/S, 2-pt 18"L, Yellow Antimicrobial	1
08-MH-03D6		/-- Grab Handles, Rear Access: (2) 12"L X 1 1/4" Dia..... S/S, 2-pt, Yellow	1
09-AS-2300	S <	Antimicr /-- Door Panels: Smooth Aluminum Upper /Smooth Aluminum / Stainless Steel Lower To be on Body Order from Mickey	1
NOTE:Upper and Center Handle Panel to be Aluminum for Dealer Installed Chevrons			
09-AS-2520		/-- Curbside Lower Door Panel: Stainless	1
09-WI-02A0	<	/-- UPPER Windows: RA Doors, Fixed Tinted Glass 17.3"W x 19.3"H WIND-H0161	1
09-WI-0600		/-- UPPER Window: CS Access, Fixed Glass, std tint	1
09-DR-WT00		Talk Through Window: Sliding Lexan Window - CLEAR	1
09-DR-WT20		/-- Sliding Window Locking Pin: 1/4" with Lanyard	1
09-FM-1100		Dri-Dek Compt Floors and shelves, Yellow	1
07-ZZ-ZZZZ		/--	1
09-ZZ-ZZZZ			1
S <		ELECTRICAL Point to Point - CELL 6 NOTE: Move Oxygen Outlets and Oxygen Bypass to Bottom of Board, Move SSCOR Gauge and Suction Switch Below Suction Canister, Move Danhard Thermostat Forward With Temp Sensor Under Danhard Thermostat, and Move 12V Outlet Forward and Delete 125 Outlet in Board. This Will Leave More Room for Customers to Install Radios. Action Area Light Will be Moved All the Way Forward in Action Area Also. (Reference 190D 24809-12G)	1
10-EC-2757	S <	/-- Temp Controlled Cabinet, Mermaid MK - Micro Horizontal Depth Stainless Steel >> NO drain outlet installed by the factory, per factory design of Mermaid. 02/14/2017 Compressor on Rear	1
10-EC-2905	<	/-- Mermaid Standard Medeco Cam key Lock Installed Includes TWO Medeco coded barrel keys.	1
10-EC-3200	S	/-- Location: ALS behind I-1 Door left hand side (See drawing)	1
10-EC-A100		/-- Accessory Load Manager: For Cooling Cabinet or Fridge	1
10-IL-02ST		Action Area Light: 12V, LED, Surface Mount	1
10-IL-02L7	S <	/-- Light Location: Action Area All the Way Forward on Board NOTE: Move A/A Light All the Way Forward in Action Area Toward Front of Truck.	1
10-IL-03ST	S	Extended Action Area Light: 12V, LED, Surface Mount	1
10-IL-02L9	S	/-- Light Location: Bottom of Cabinet B1	1
S <		UPHOLSTERY - CELL 7 NOTE: Cabinet head of bench will have rounded armrest at bench side and C/S door side of cabinet. Also Install a 1/4" Pad Between Armrest on Top of Cabinet on Aisle Side to be Approx. 1.5" Wide.	1
11-00-UC04		Upholstery Color: Light Gray(Dove) Vac form	1
11-00-UC11		/-- Center Trough Upholstery Color: Color Key to Rest of Truck	1
ZZ-ZZ-ZZZZ		/--	1
11-00-UT05		Uph Joint Type: Vacuum Formed - Seamless	1
11-SB-0005		Squad Bench seat cushion cut-outs: None	1
11-SB-0003		/-- Post And Wheel Cups: NONE	1
11-SE-CSPD		Head Protection: Pad over CS Entry Door	1
11-SE-REPD		Head Protection: 2" Pad over Rear Access Doors, Full Width	1
PAINT - STRIPES - DECALS			
12-PT-UNCT		/-- Undercoating : Per QVM Guidelines, STD	1
12-DC-0001		Reflective Tape: On painted edges of Exterior Door Frame	1
12-DC-GA10		Compartment Finish: Diamond Plate Standard	1

PART NO	S	DESCRIPTION	QTY
12-PT-0100	S <	Primary (Over All) Color: Dodge Flame Red to Match Chassis NOTE: Chassis Will Need to be Painted Also NOTE: Own Color Formula (Great Bend) NOTE: Paint Welds at Door Jamb in C/S Step Well Red Also	1
12-DC-0002	<	Flip Step Reflective/Prismatic Tape: Red/White/R/W/R/W/R Install on rearward facing edge of flip up step at rear module entry. REV Tape-RS	1
12-PT-0112		Tape Stripe: NONE (KKK-F Deviation)	1
11-YZ-0962		Non-Compliant to KKK-F 3.16.2 ;Exterior Safety stripe to be Orange	1
12-PT-03B0	S <	Box Roof Oxford White (YZ) ILO Over All, Not Visible From Ground Roof shall be painted white but not to be visible from ground.	1
12-PT-RF00	<	Roof Paint: Color to match, Matte Finish Not sanded and buffed.	1
ZZ-ZZ-ZZZZ		Paint Belt: NONE	1
12-PT-0600		Pin Stripe: NONE	1
12-PT-1000		Special Striping: Chevron Items: NONE	1
12-ZZ-ZZZZ		Lettering: NONE	1
ZZ-ZZ-ZZZZ		Drip Rails: Bright Alum, De-burred & rounded corners (SHIPPED LOOSE) Include a drip rail over the C/S Entry Door shipped loose.	1
12-PT-1301		Add Shop Note to Shipped Loose Section of W/O	1
12-PT-2000			1
12-ZZ-ZZZZ			1
12-PT-DRIS	<		1
12-ZZ-ZZZZ			1
DETAIL - SHIP LOOSE ITEMS			1
12-PT-DRIZ	S <	Drip Rails:Detail-Refer to Paint Section for Drip Rail Information (Ship Loose) Include a drip rail over the C/S Entry Door.	1
13-00-0200		*Check front of W/O under chassis section for Add' items*	1
ZZ-ZZ-ZZZZ			1
13-10-XM00		Owner's Manual USB Flash Drive ship loose	1
13-10-XMA0		Printed Owner's Manual Not Required	1
13-00-0001			1
13-GL-0000		Glove Holder, Ship Loose: NONE	1
ZZ-ZZ-ZZZZ			1
13-KK-KDEC		Decals: KKK / DOT Pkg, Blue/White reflective - Ship Loose	1
13-RF-STAR		Decals: Install 32" Star of Life on Mod Roof	1
ZZ-ZZ-ZZZZ			1
13-KK-NSSB		Decals: NO SMOKING & SEATBELT, installed, cab & pt. area.	1
ZZ-ZZ-ZZZZ			1
13-KL-0010		AEV Logos: Installed on unit per AEV standard locations	1
13-MH-05ST	<	Fire Extinguisher, 5 pound, shipped loose, Std Part No: EXTI-01	1
11-ZZ-0932	<	Exception to C.16.1 1 Required Two fire extinguishers installed by FSAM Fire extinguishers were not installed iwth one in the driver's cab, one in the patient compartment at the time of departure from the final stage Ambulance Manufacturer.	1
13-MH-10A0		Reflector Pkg: Body - 2ea, Side Fr Amber, Side Rear Red, Rear Red	1
ZZ-ZZ-ZZZZ			1
13-SB-0003		Post And Wheel Cups: NONE	1
13-SP-TIRE		Spare Tire: Refer To Chassis Section to See if it gets one.	1
33-KK-CLHT	S <	Decal: "CLEARANCE HEIGHT 10' " on Windshield Section 3.15.2 NOTE: CLEARANCE LABEL TO BE FOR 10 FOOT	1

PART NO	S	DESCRIPTION	QTY
ZZ-ZZ-ZZZZ		--	1
34-XX-0001		Primary Cot: NONE included	1
ZZ-ZZ-ZZZZ		--	1
34-XX-0002		Secondary Stretcher: NONE included	1
ZZ-ZZ-ZZZZ		--	1
34-XX-5000	<	Indemnification Statement	1
		The purchaser agrees to defend, indemnify and hold REV harmless from any claims, costs (including actual attorneys' fees), damages and liabilities caused in whole or in part by any alteration or modification of, or changes or additions to the Purchased Products OR use of product for purposes it was not designed or intended for.	
		== 172 x 95 T-1 LWB Dodge Base Price - 15.011 10/08/19 ==	1
		GENERAL CONVERSION	1
03-05-103P	S	2020 **172** Dodge Hemi Gas D5500 4 x 2 Regular cab (2020 FSA Conv PKG)	1
36-AA-0001		WORK ORDER STATUS:	1
00-90-0301		-- For Confirmation	1
36-CO-0001		-- CHANGE ORDER POLICY	1
36-CO-0010	<	-- After Confirmation, Prior to Engineering Change Fee is \$50 Per Item, Plus Option Cost	1
36-CO-0020	<	-- After Confirmation, After Engineering Start Change Fee is \$100 Per Item, Plus 150% Option Cost	1
		Special order or non-stocking parts that are purchased for any ordered option that is subsequently deleted will be charged for and shipped loose.	
36-CO-0030	<	-- After Confirmation, After Production Start Change Fee is \$100 Per Item, Plus 200% Option Cost	1
		Special order or non-stocking parts that are purchased for any ordered option that is subsequently deleted will be charged for and shipped loose.	
ZZ-ZZ-ZZZZ		--	1
36-EO-0001		-- ***END OF ORDER***	1

CONCEPTIONAL DRAWINGS ONLY: DRAWINGS ARE NOT TO SCALE, ALL MEASURES ARE APPROXIMATE & SUBJECT TO ENGINEERING CHANGE

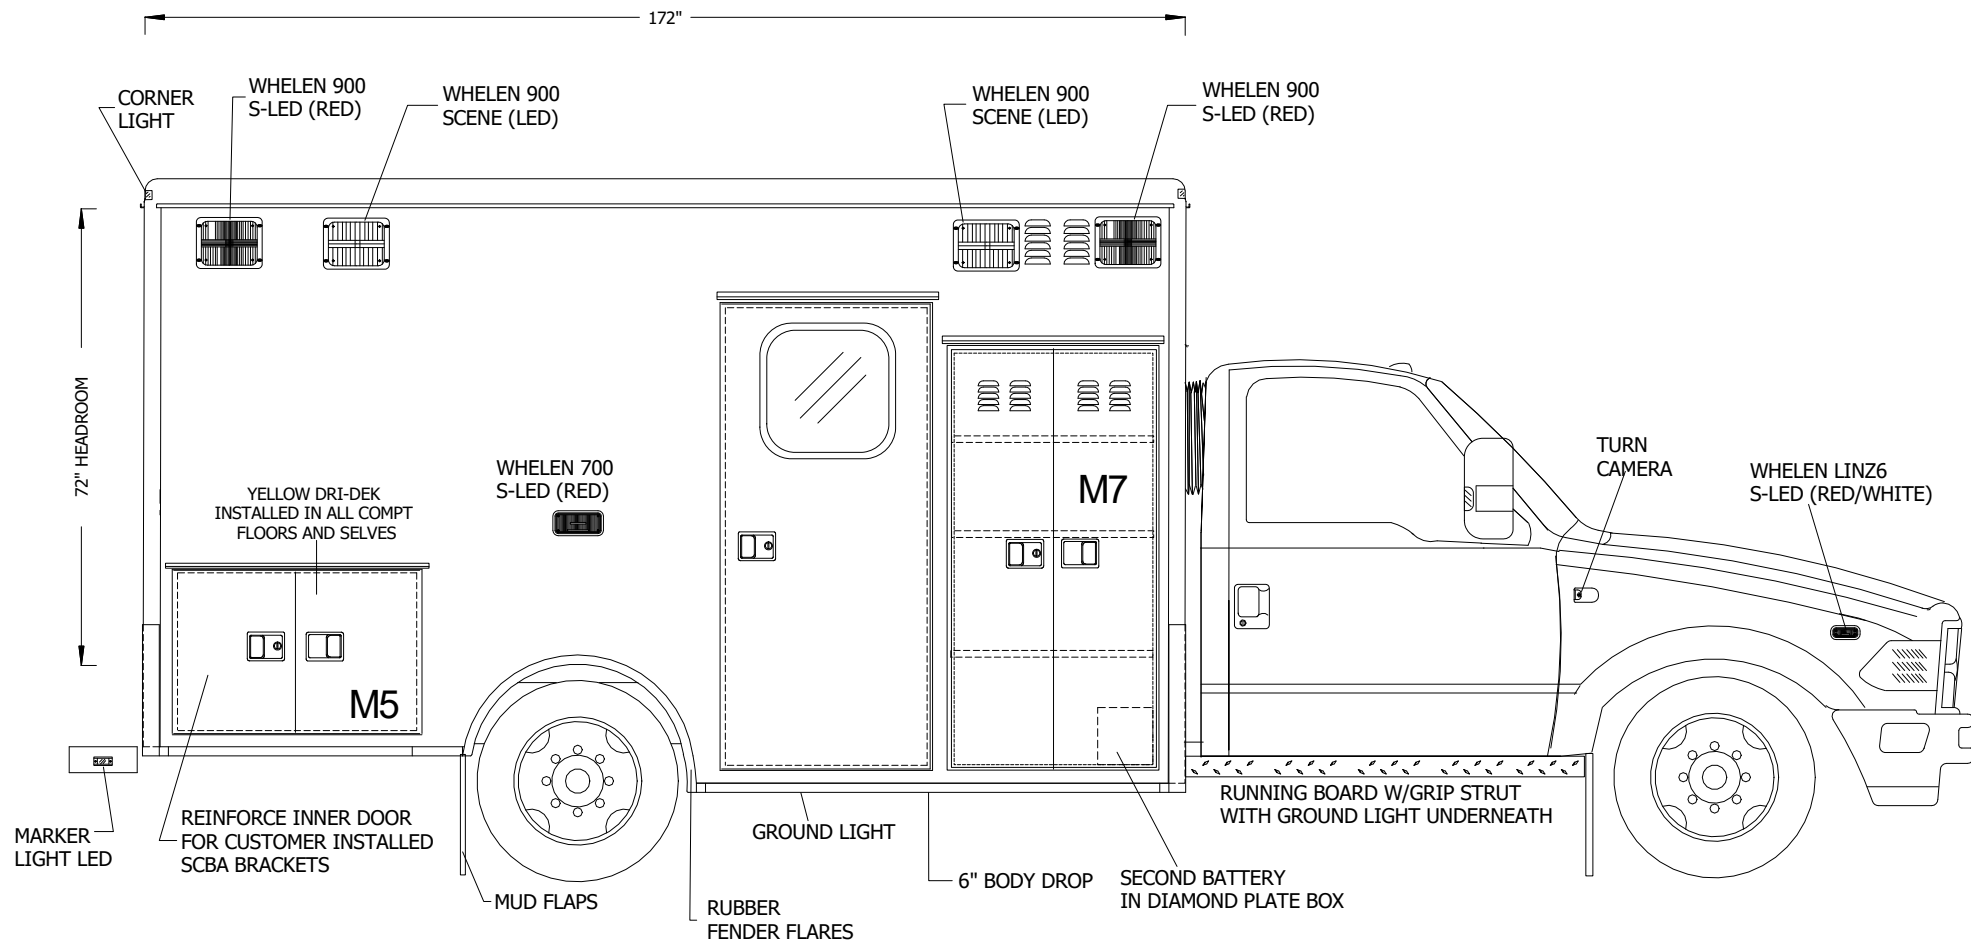

COMPARTMENT DIMENSIONS

COMPT	HEIGHT	WIDTH	DEPTH
M1	70.25"	22"	21"
M2	41"	51"	21"
M2.5	10"	32"	21"
M3	61.5"	36"	21"
M5	28.75"	34"	21"
M7	67.5"	32.75"	21" I/O
C/S	82.8"	31"	N/A
REAR	60-5/8"	46-3/4"	N/A


* CONCEPTIONAL DRAWINGS

* Some shown are optional


* Due to AEV's ongoing improvements, drawings can change.



AMERICAN EMERGENCY VEHICLES

TITLE	D 5500 Exterior	 ALACHUA COUNTY
DWG. -E	REV.	
TRUCK#		
BY:MDB	DATE: 7-14-20	
BODY #:		


CONCEPTIONAL DRAWINGS ONLY: DRAWINGS ARE NOT TO SCALE, ALL MEASURES ARE APPROXIMATE & SUBJECT TO ENGINEERING CHANGE

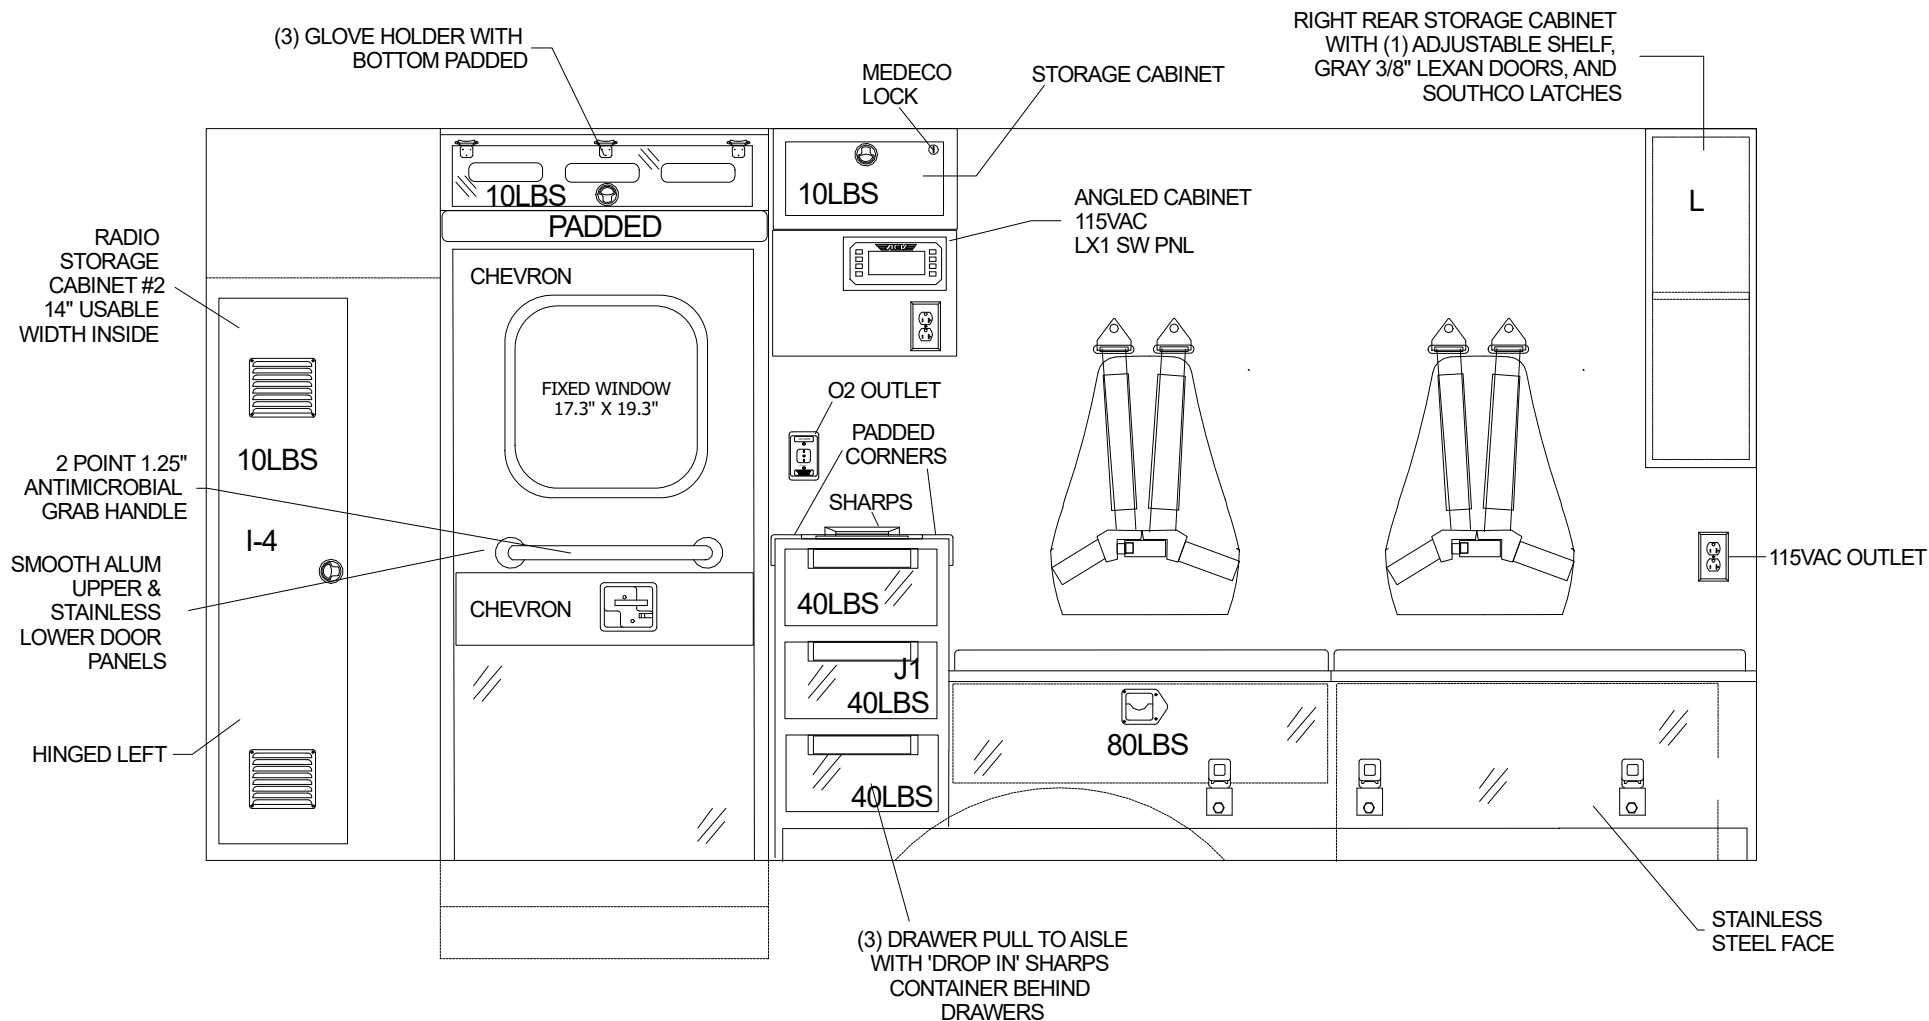


* CONCEPTIONAL DRAWINGS
 * Some shown are optional
 * Due to AEV's ongoing improvements, drawings can change.




AMERICAN EMERGENCY VEHICLES	
TITLE	Curbside Interior
DWG. # - I	REV.
TRUCK#	
BY: MDB	DATE: 7-14-20


ALACHUA COUNTY

CONCEPTIONAL DRAWINGS ONLY: DRAWINGS ARE NOT TO SCALE, ALL MEASURES ARE APPROXIMATE & SUBJECT TO ENGINEERING CHANGE

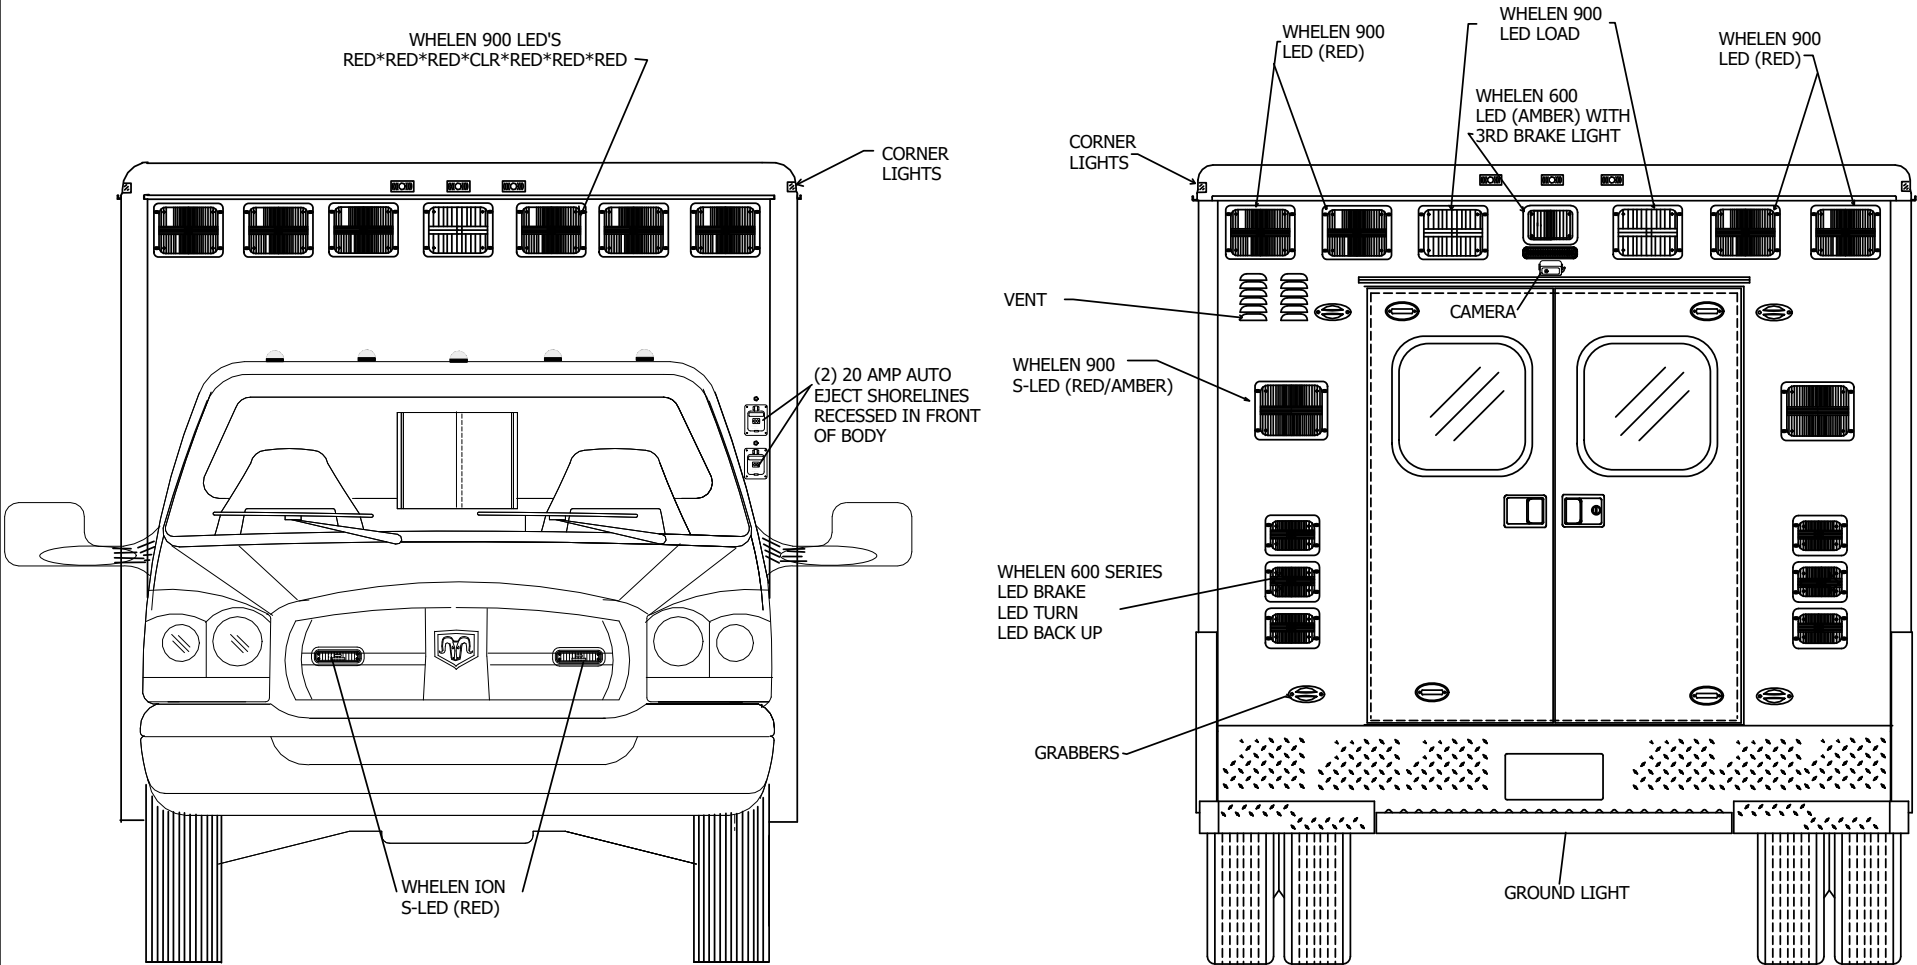


AMERICAN EMERGENCY VEHICLES		
TITLE	D 5500 Exterior	
DWG.# -E	REV.#	
TRUCK#		
BY:MDB	DATE: 7-14-20	
BODY #:		



ALACHUA COUNTY

SIDE VIEW OF ALS CABT.
(RADIO CABINET DETAIL)

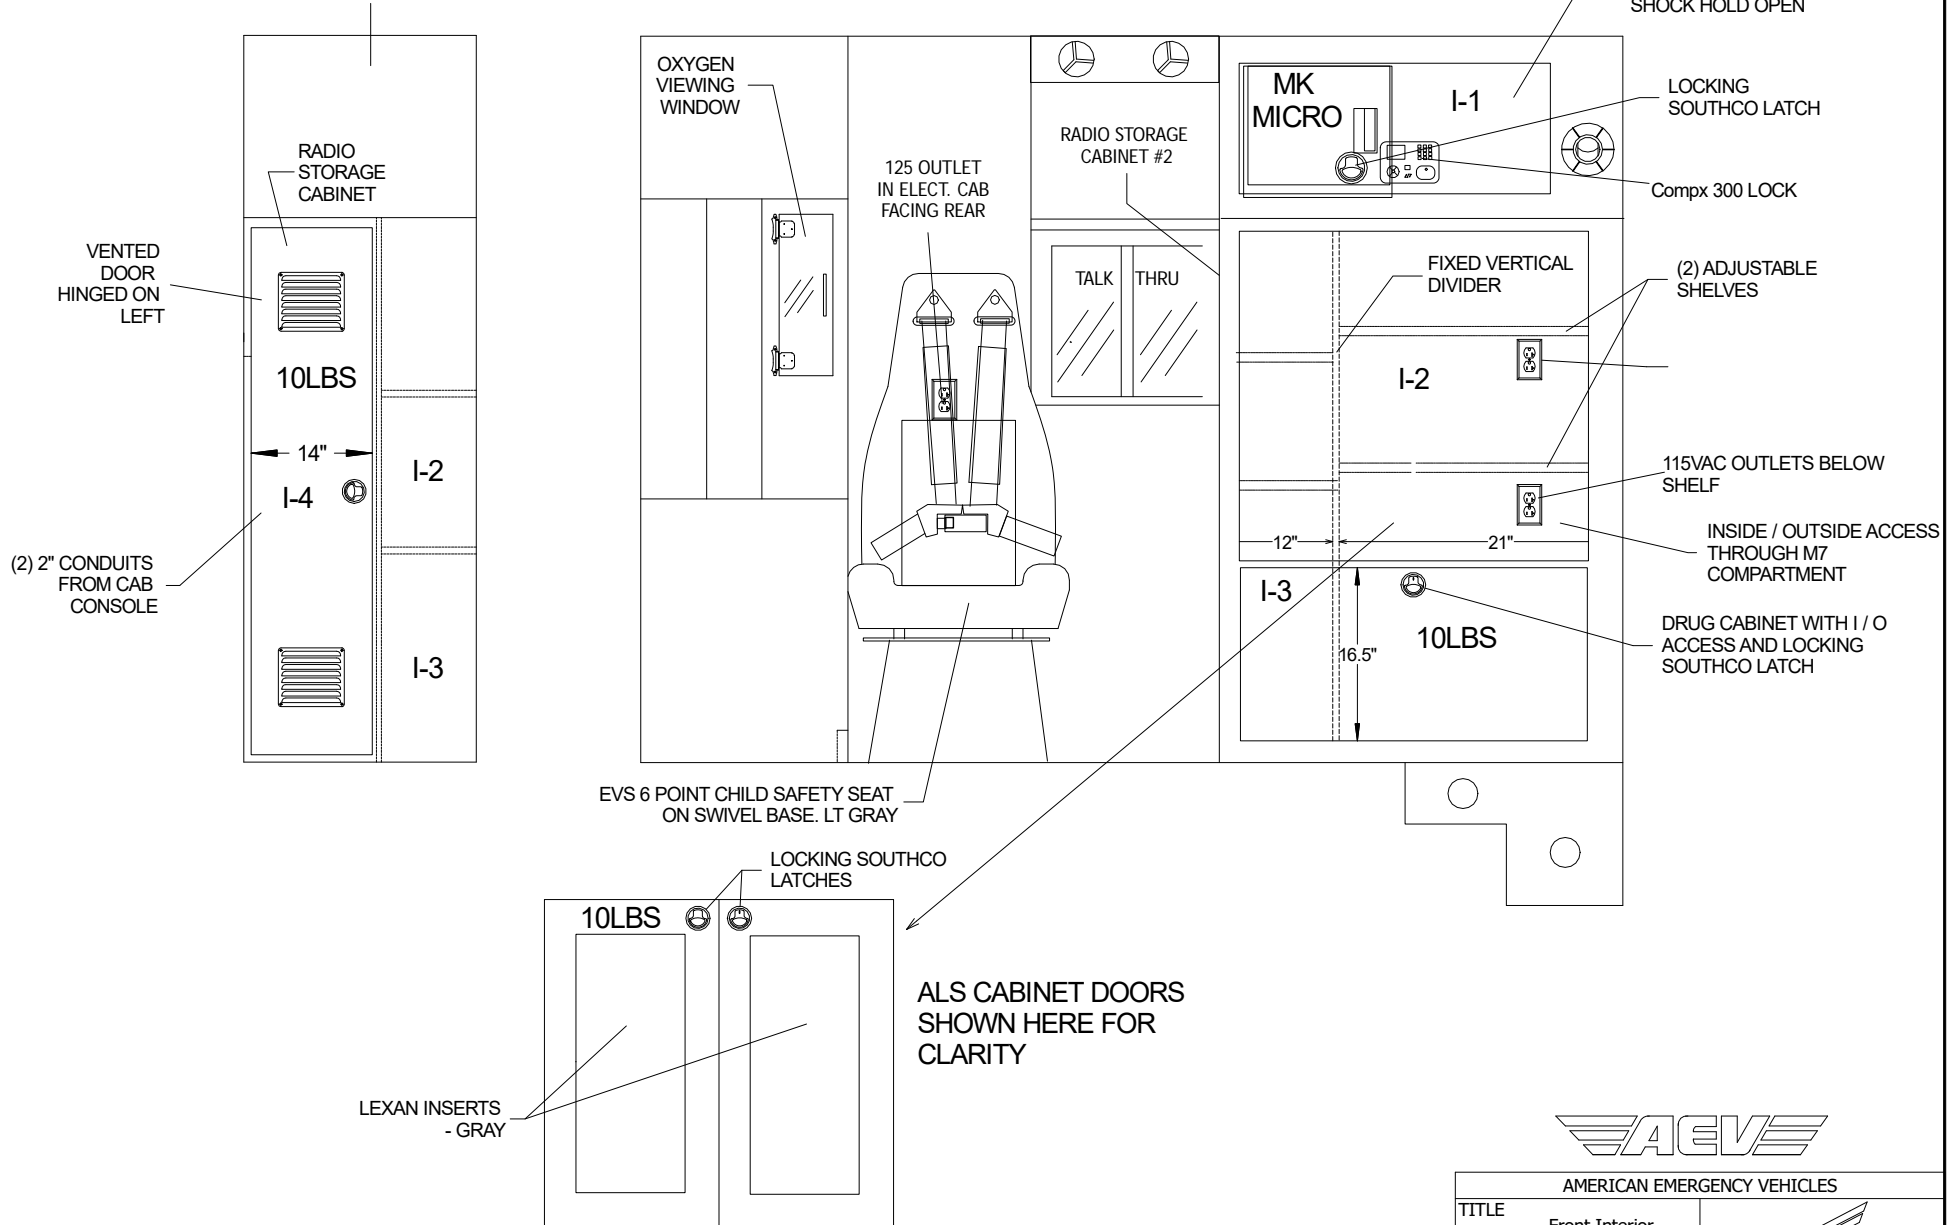

* CONCEPTIONAL DRAWINGS
 * Some shown are optional
 * Due to AEV's ongoing improvements, drawings can change.




AMERICAN EMERGENCY VEHICLES	
TITLE	Front Interior
DWG.#-I	REV.
TRUCK#	
BY: MDB	DATE: 7-14-20



ALACHUA COUNTY

CONCEPTIONAL DRAWINGS ONLY: DRAWINGS ARE NOT TO SCALE, ALL MEASURES ARE APPROXIMATE & SUBJECT TO ENGINEERING CHANGE

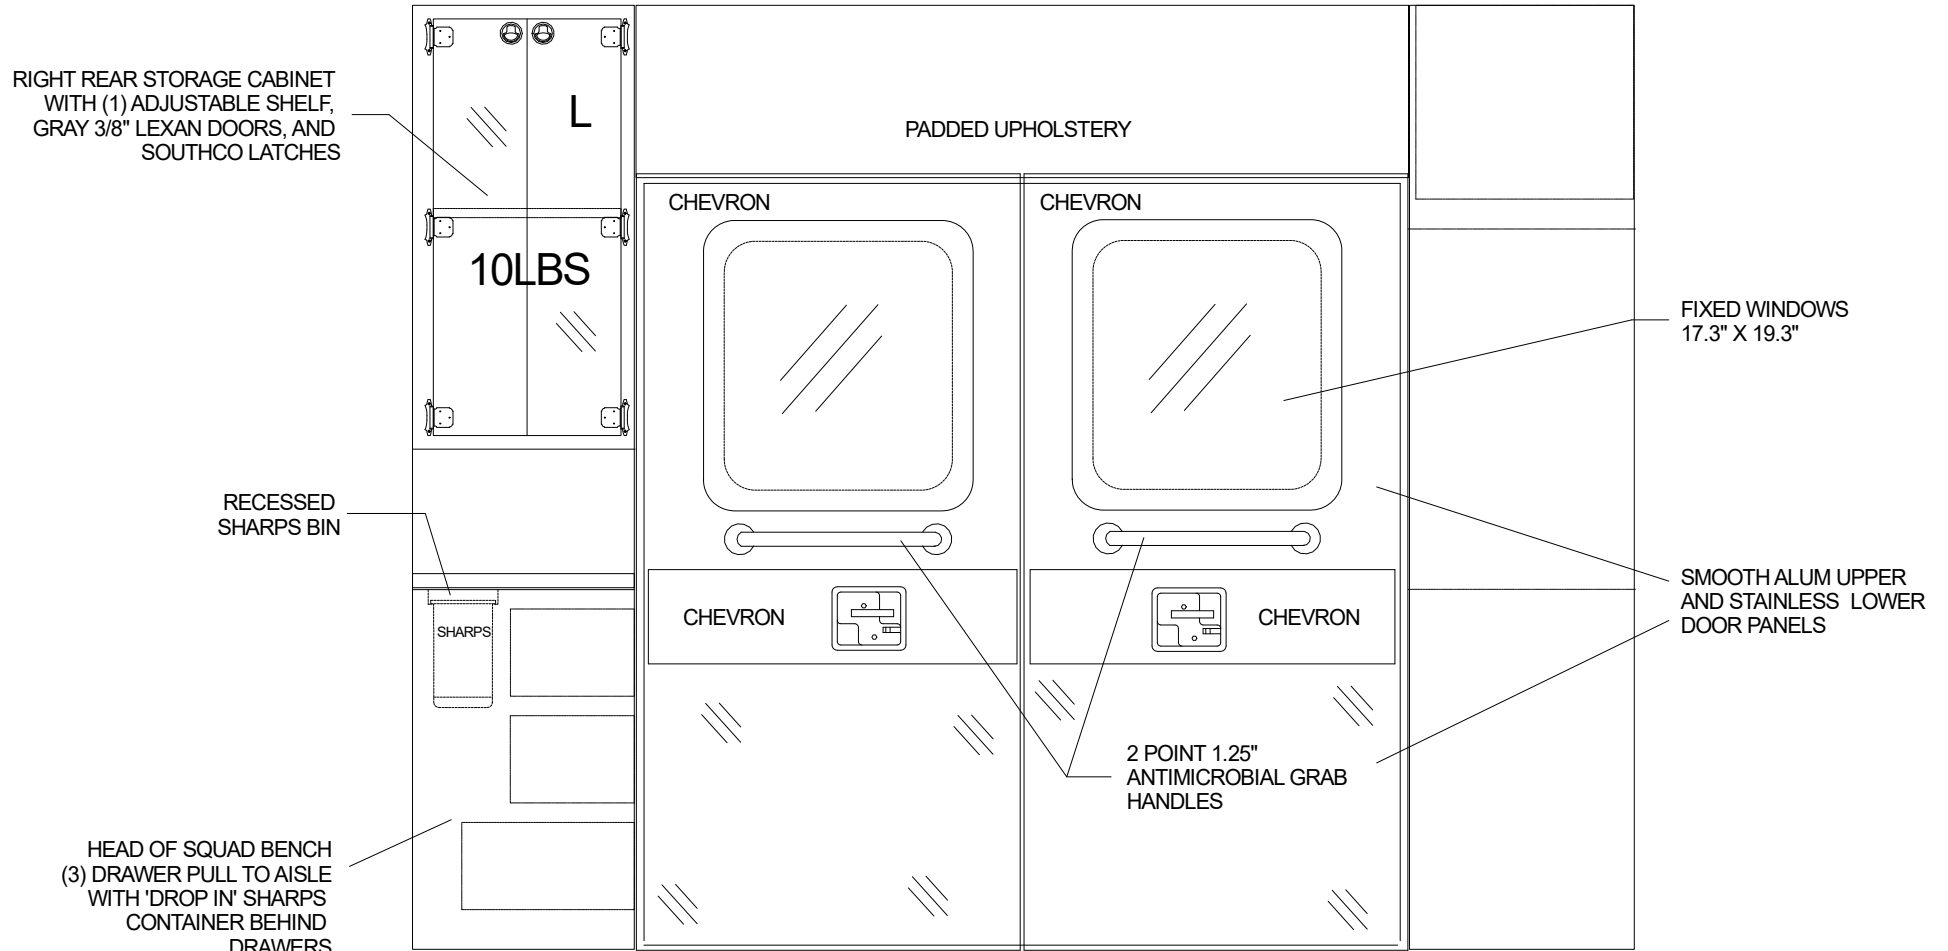

* CONCEPTIONAL DRAWINGS
 * Some shown are optional
 * Due to AEV's ongoing improvements, drawings can change.




AMERICAN EMERGENCY VEHICLES	
TITLE	Rear Interior
DWG.#-I	REV.#
TRUCK#	
BY: MDB	DATE: 7-14-20



ALACHUA COUNTY

CONCEPTIONAL DRAWINGS ONLY: DRAWINGS ARE NOT TO SCALE, ALL MEASURES ARE APPROXIMATE & SUBJECT TO ENGINEERING CHANGE

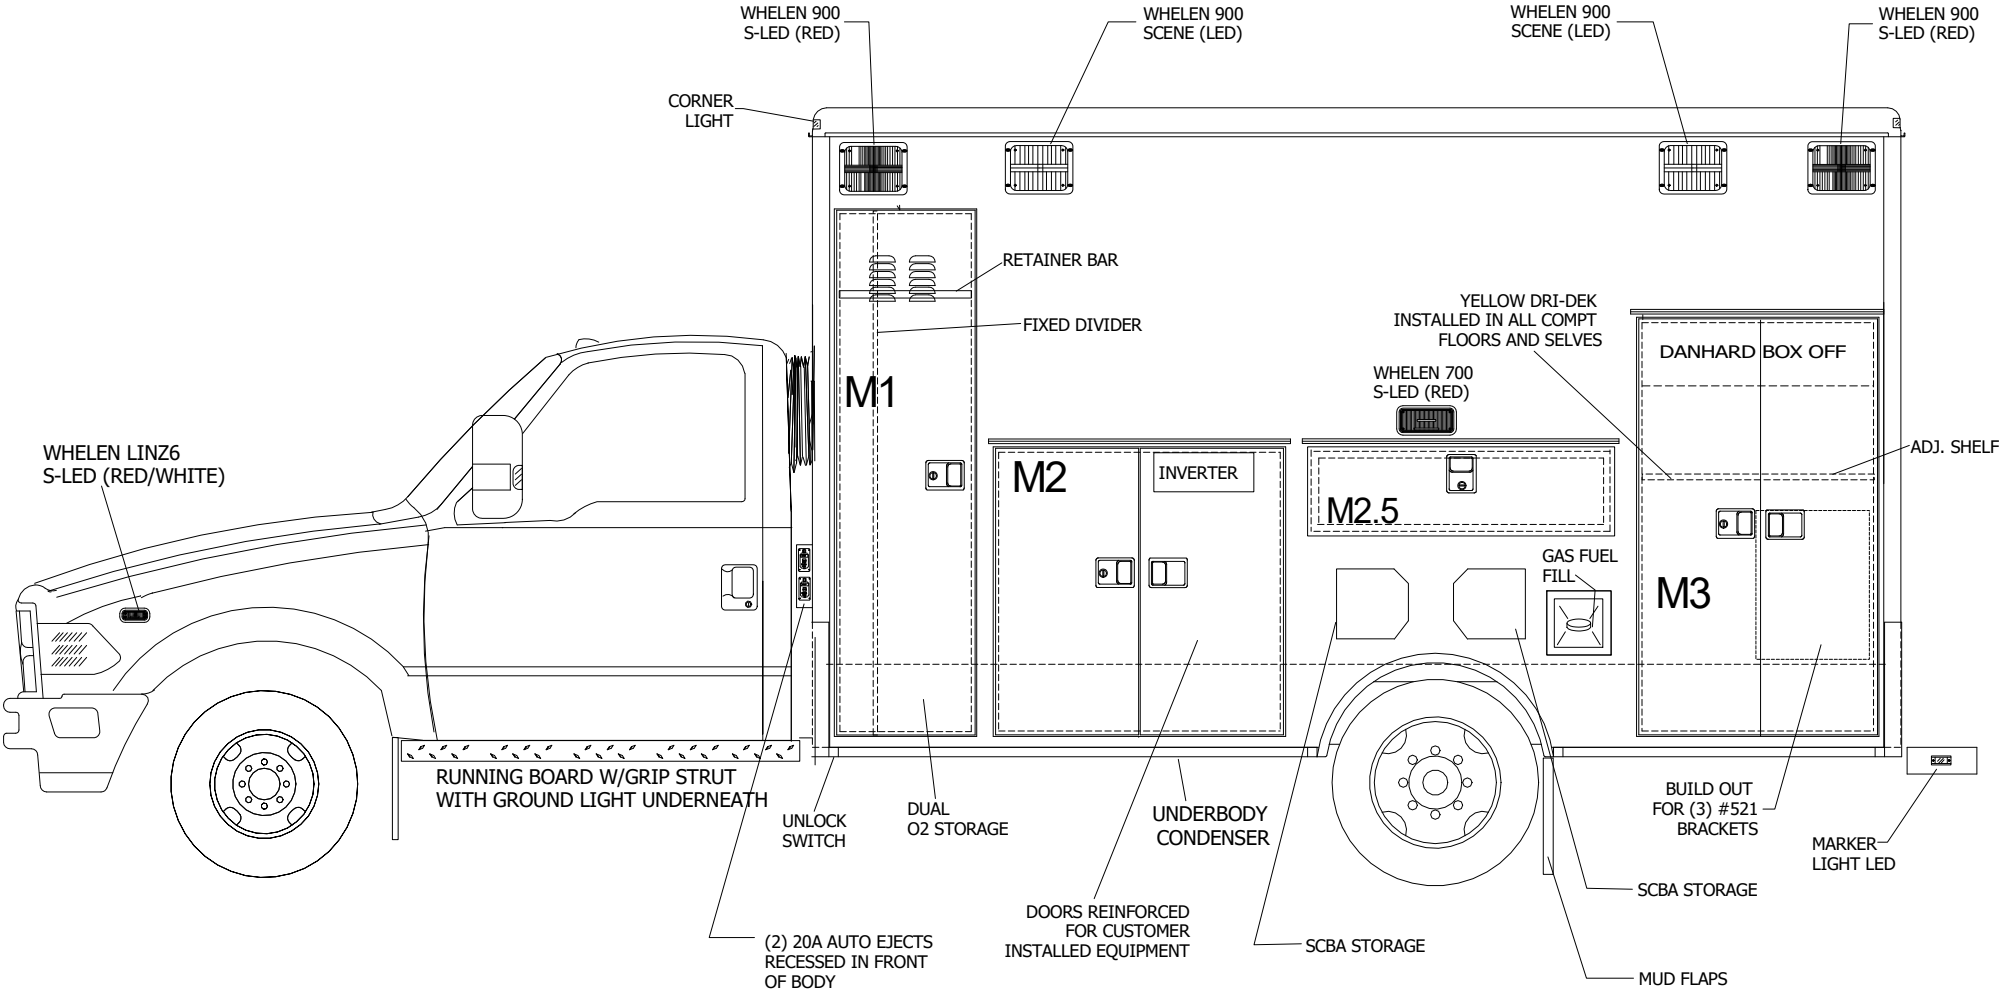

COMPARTMENT DIMENSIONS			
COMPT	HEIGHT	WIDTH	DEPTH
M1	70.25"	22"	21"
M2	41"	51"	21"
M2.5	10"	32"	21"
M3	61.5"	36"	21"
M5	28.75"	34"	21"
M7	67.5"	32.75"	21" I/O
C/S	82.8"	31"	N/A
REAR	60-5/8"	46-3/4"	N/A


* CONCEPTIONAL DRAWINGS
* Some shown are optional
* Due to AEV's ongoing improvements, drawings can change.



AMERICAN EMERGENCY VEHICLES	
TITLE	D 5500 Exterior
DWG. # - E	REV.
TRUCK#	
BY: MDB	DATE: 7-14-20
BODY #:	

ALACHUA COUNTY


CONCEPTIONAL DRAWINGS ONLY: DRAWINGS ARE NOT TO SCALE, ALL MEASURES ARE APPROXIMATE & SUBJECT TO ENGINEERING CHANGE

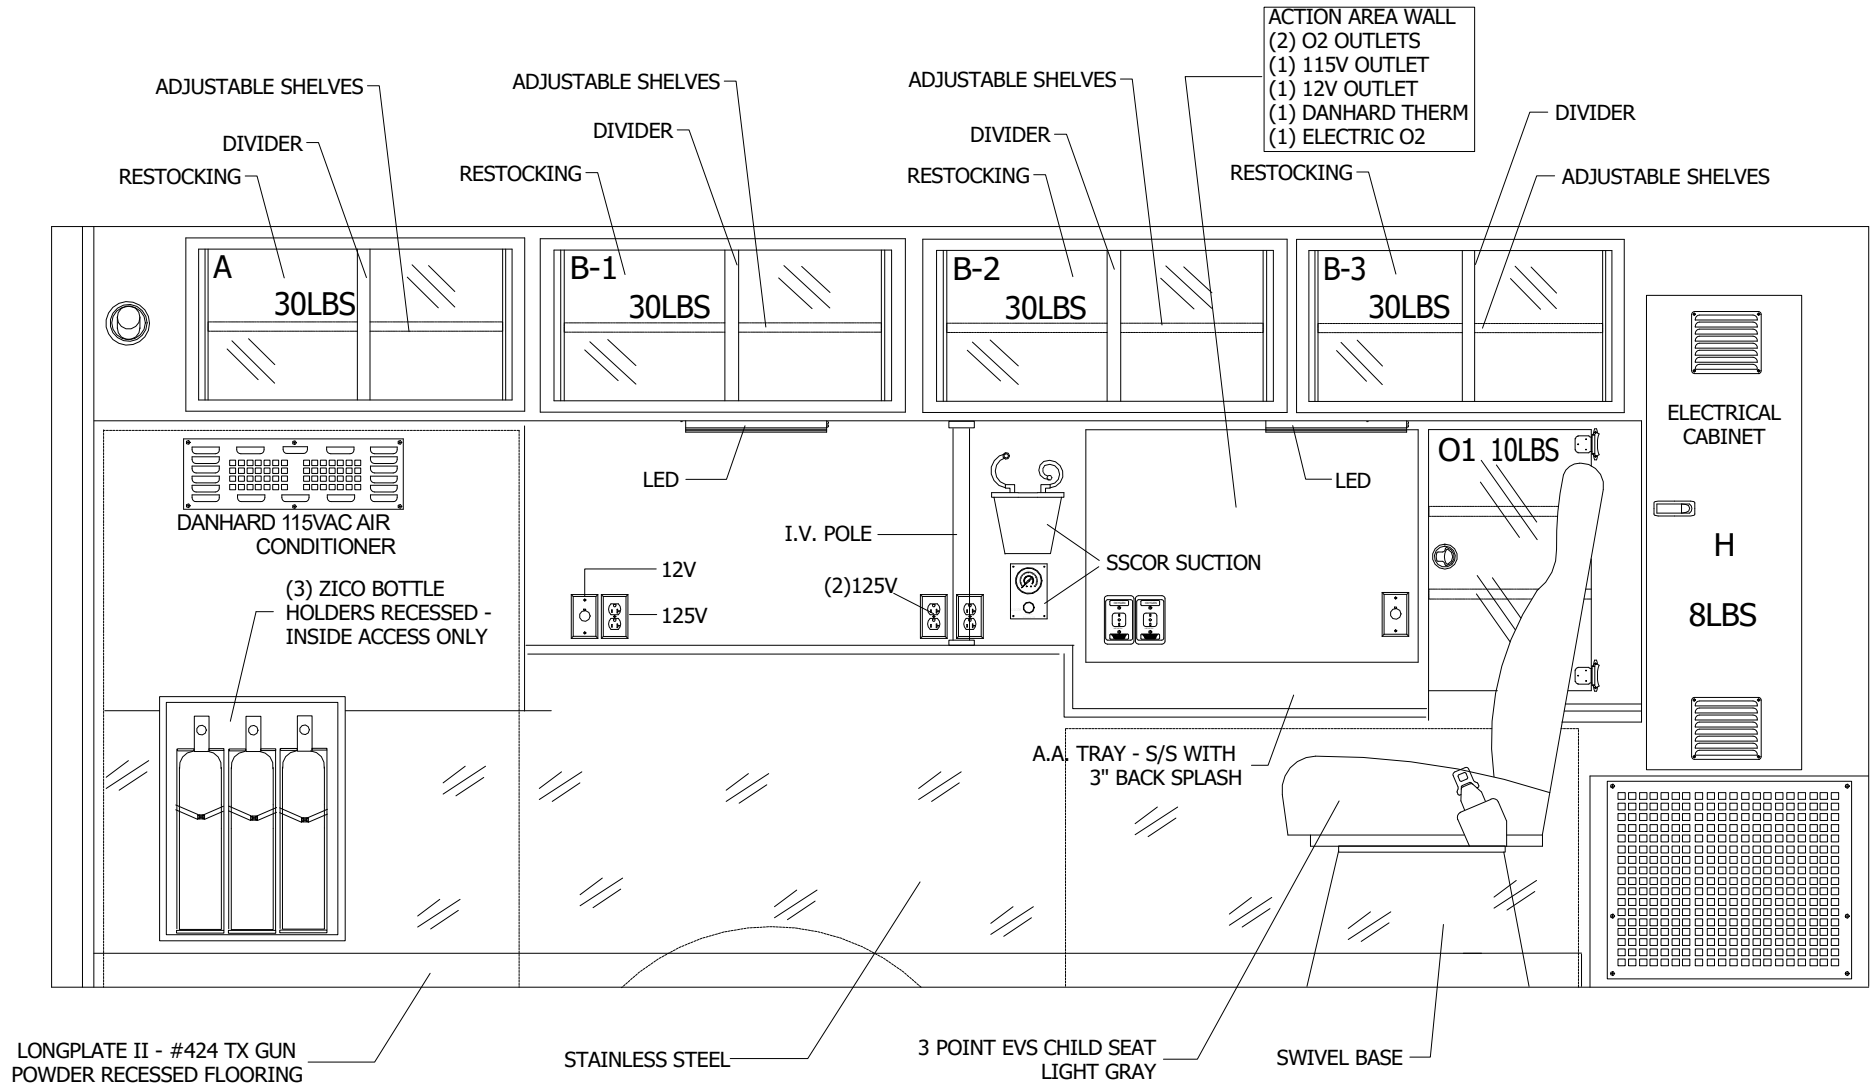

* CONCEPTIONAL DRAWINGS
 * Some shown are optional
 * Due to AEV's ongoing improvements, drawings can change.



AMERICAN EMERGENCY VEHICLES	
TITLE	Street Side Interior
DWG.#-I	REV.
TRUCK#	
BY: MDB	DATE:



ALACHUA COUNTY